




Item # 20139492, INSTA-LOCK Fitting TYPE B Female Coupler x Male NPT Thread B100SS w/ SS HANDLE 1 in 316# Stainless Steel

APPLICATION: Type B fitting is normally threaded onto a pipe or manifold which joins to a rubber hose assembly which is connected and disconnected regularly. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

BRANDING: Example: Continental Contitech B200SS

PRESSURE RATING: Sizes 1/2"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F) with Standard Nitrile gaskets.

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

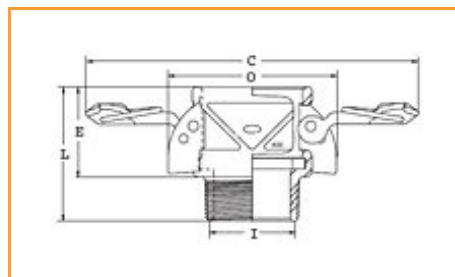

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	INSTA-LOCK™ Female Coupler
Style	TYPE B
Material	316# Stainless Steel

Brand	INSTA-LOCK™ TYPE B
Order Code	650-842

Specifications

End Type A	Female Coupler
End Size A	1/2
End Type B	Male NPT
End Size B	1/2
C - Max. Width w/ Cam Arms Extended	4.969 in 126.21 mm
L - Overall Length	1.906 in 48.60 mm
I - Min. I.D.	0.469 in
Max. Working Pressure	250.0 psi
Weight	0.7900 lb
Order Increment	1
O - Max. Width w/ Cam Arms Closed	2.469 in
E - Exposed Length	1.188 in

MideastUS@contitech.us
1-800-235-4632
Contitech.us

ContiTech