




## Item # 20195310, INSTA-LOCK Fitting TYPE D Female Coupler x Female NPT Thread D600AL w/ BR HANDLE 6 in Aluminum

**APPLICATION:** Type D fitting is commonly threaded onto a pipe, threaded hose end, or manifold system, which is connected and disconnected on a regular basis. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

**BRANDING:** Example: Continental Contitech D200SS

**PRESSURE RATING:** Sizes 1"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F) with Standard Nitrile gaskets.

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

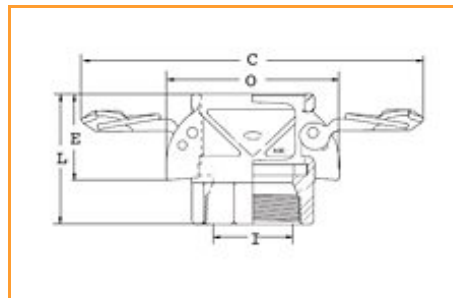

[Product Specifications](#) | [Specifications](#)

### Product Specifications

Type	INSTA-LOCK™ Female Coupler
Style	TYPE D
Material	Aluminum

<b>Brand</b>	INSTA-LOCK™ TYPE D
<b>Order Code</b>	650-828

## Specifications

<b>End Type A</b>	Female Coupler
<b>End Size A</b>	6
<b>End Type B</b>	Female NPT
<b>End Size B</b>	6
<b>C - Max. Width w/ Cam Arms Extended</b>	16.096 in 408.84 mm
<b>L - Overall Length</b>	4.513 in 114.63 mm
<b>O - Max. Width w/ Cam Arms Closed</b>	9.344 in
<b>E - Exposed Length</b>	2.719 in
<b>I - Min. I.D.</b>	5.750 in
<b>Max. Working Pressure</b>	75.0 psi
<b>Weight</b>	4.380 lb
<b>Order Increment</b>	1

[MideastUS@contitech.us](mailto:MideastUS@contitech.us)

1-800-235-4632

Contitech.us

**ContiTech**