




Item # 20195344, INSTA-LOCK Fitting TYPE B Female Coupler x Male NPT Thread B075SS w/ SS HANDLE 3/4 in 316# Stainless Steel

APPLICATION: Type B fitting is normally threaded onto a pipe or manifold which joins to a rubber hose assembly which is connected and disconnected regularly. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

BRANDING: Example: Continental Contitech B200SS

PRESSURE RATING: Sizes 1/2"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F) with Standard Nitrile gaskets.

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

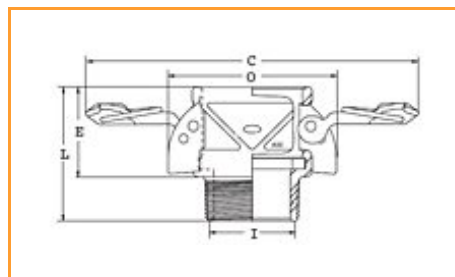

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	INSTA-LOCK™ Female Coupler
Style	TYPE B
Material	316# Stainless Steel

Brand	INSTA-LOCK™ TYPE B
Order Code	650-842

Specifications

End Type A	Female Coupler
End Size A	4
End Type B	Male NPT
End Size B	4
C - Max. Width w/ Cam Arms Extended	11.538 in 293.07 mm
L - Overall Length	4.218 in 107.56 mm
I - Min. I.D.	3.750 in
Max. Working Pressure	150.0 psi
Weight	0.5100 lb
Order Increment	1
O - Max. Width w/ Cam Arms Closed	6.780 in
E - Exposed Length	2.593 in

MideastUS@contitech.us

1-800-235-4632

Contitech.us

ContiTech