




**Item # 20195349, INSTA-LOCK Fitting TYPE C Female Coupler x Hose Shank C075SS w/ SS HANDLE
3/4 in 316# Stainless Steel**

APPLICATION: Type C fitting can be attached to a rubber hose with the use of interlocking ferrules, crimp sleeves, or bands. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

BRANDING: Example: Continental Contitech C200SS

PRESSURE RATING: Sizes 1/2"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F) with Standard Nitrile gaskets.

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

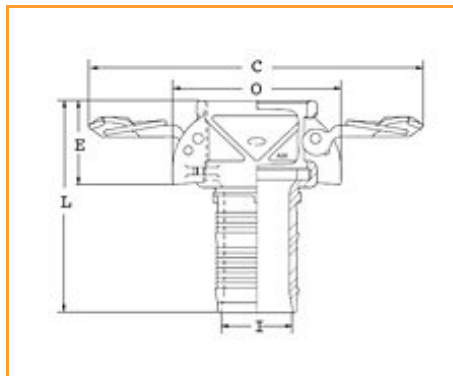

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	INSTA-LOCK™ Female Coupler
Style	TYPE C
Material	316# Stainless Steel

Brand	INSTA-LOCK™ TYPE C
Order Code	650-843

Specifications

End Type A	Female Coupler
End Size A	4
End Type B	Hose Shank
End Size B	4
C - Max. Width w/ Cam Arms Extended	11.538 in 293.07 mm
L - Overall Length	7.218 in 183.34 mm
I - Min. I.D.	3.468 in
O - Max. Width w/ Cam Arms Closed	6.780 in
E - Exposed Length	2.994 in
Max. Working Pressure	150.0 psi
Weight	0.5800 lb
Order Increment	1

MideastUS@contitech.us
 1-800-235-4632
 Contitech.us

ContiTech