




Item # 20195366, INSTA-LOCK Fitting TYPE D Female Coupler x Female NPT Thread D600SS w/ SS HANDLE 6 in 316# Stainless Steel

APPLICATION: Type D fitting is commonly threaded onto a pipe, threaded hose end, or manifold system, which is connected and disconnected on a regular basis. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

BRANDING: Example: Continental Contitech D200SS

PRESSURE RATING: Sizes 1"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F) with Standard Nitrile gaskets.

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

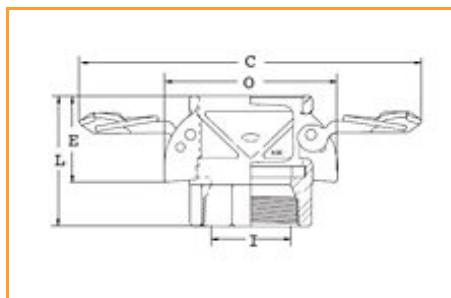

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	INSTA-LOCK™ Female Coupler
Style	TYPE D
Material	316# Stainless Steel

Brand	INSTA-LOCK™ TYPE D
Order Code	650-844

Specifications

End Type A	Female Coupler
End Size A	6
End Type B	Female NPT
End Size B	6
C - Max. Width w/ Cam Arms Extended	16.096 in 408.84 mm
L - Overall Length	4.513 in 114.63 mm
O - Max. Width w/ Cam Arms Closed	9.344 in
E - Exposed Length	2.719 in
I - Min. I.D.	5.750 in
Max. Working Pressure	75.0 psi
Weight	11.110 lb
Order Increment	1

MideastUS@contitech.us

1-800-235-4632

Contitech.us

ContiTech