




Item # 20195372, INSTA-LOCK Fitting TYPE F Male Adapter x Male NPT Thread F075SS 3/4 in 316# Stainless Steel

APPLICATION: Type F fitting is normally threaded into pipe or manifold connections and mated with Part C, Part B, or Part D. Used in applications that require frequent connections. Insta-Lock™ fittings are designed for liquids and dry bulk. Consult the chemical resistance guide for specific chemical recommendations.

BRANDING: Example: Continental Contitech F200SS

PRESSURE RATING: Sizes 1/2"– 2", 250 psi; sizes 2 1/2"– 4", 150 psi; sizes 5"– 6", 75 psi. Recommended working pressure ratings based on ambient temperature (70 °F).

Note: Continental Contitech Insta-Lock Fittings are never to be used in steam or compressed air service. Continental Contitech Insta-Lock Cam Arms are designed exclusively for Insta-Lock fittings.

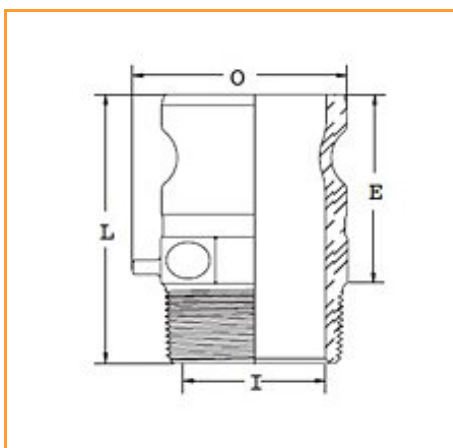

[Product Specifications](#) | [Specifications](#)

Product Specifications

Style	Type F
Material	316# Stainless Steel
Brand	INSTA-LOCK™ TYPE F

Order Code

650-846

Specifications

End Type A	Male Adapter
End Size A	4
End Type B	Hex Male NPT Thread
End Size B	4
O - Max. O.D.	4.994 in 126.85 mm
L - Overall Length	4.746 in 120.55 mm
E - Exposed Length	3.184 in
I - Min. I.D.	3.734 in
Weight	0.5000 lb
Distance Chain Lug Extends from Body	0.375 in
Order Increment	1

MideastUS@contitech.us

1-800-235-4632

Contitech.us

ContiTech