



Item # 20414701, INFINITY Fuel Drop Hose 3 in x 100 ft, 100 PSI, Black

APPLICATION: Constructed with the exclusive PVC double helix for superior flexibility, abrasion resistance and low coefficient of friction for ease of maneuverability. Lightweight in construction, it is designed to transfer biodiesel and ethanol blends, gasoline and other petroleum products under pressure, gravity flow or medium suction (up to 23° Hg) at ambient temperature and with an aromatic content of 60% or less.

CONSTRUCTION TUBE: Black Nitrile synthetic rubber (static dissipating).


COVER: Black Chemivic™ synthetic rubber with orange & green Pliovic® outer helix.

REINFORCEMENT: Synthetic fabric plies with static wire.

TEMPERATURE: -40 °F to 160 °F (-40 °C to 71 °C)

COUPLINGS: Use Continental Contitech Insta-Lock Cam & Groove Fittings with this product.

BRANDING: Example: Infinity™ Drop Hose Continental Contitech.

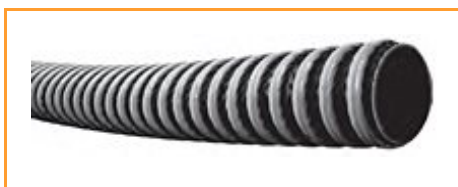

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	Petroleum Transfer
Style	Petrol Transfer Hose
Construction Tube	Black Nitrile synthetic rubber (static dissipating).
Cover	Black Chemivic™ synthetic rubber with orange & green Pliovic® outer helix.
Reinforcement	Synthetic fabric plies with static wire.

Color	Black
Min. Temperature	-40 °F -40 °C
Max. Temperature	160 °F 71 °C
Max. Working Pressure	100.0 psi 0.69 MPa
Brand	INFINITY™ FUEL DROP
Order Code	543-773

Specifications

I.D.	3 in 76.00 mm
Nom. O.D.	3.800 in 95.48 mm
Length	100.000 ft
Bend Radius	2.000 in 1.46 mm
Vacuum Rating	23.000 inHg 584.00 mmHg
Weight	1.460 lb/ft 2.18 kg/m

MideastUS@contitech.us

1-800-235-4632

Contitech.us

ContiTech