



## Item # 20439980, INFINITY HD Fuel Drop Hose 3 in x 100 ft, 150 PSI, Black

**APPLICATION:** Constructed with the exclusive PVC double helix for superior flexibility, abrasion resistance and low coefficient of friction for ease of maneuverability. Lightweight in construction, Infinity HD (Heavy Duty) is designed for higher working pressure applications (150 PSI). It is suitable in gravity flow or medium suction at ambient temperature. Designed to transfer biodiesel and ethanol blends, gasoline and other petroleum products with an aromatic content of 60% or less.

**CONSTRUCTION TUBE:** Black Nitrile synthetic rubber (static dissipating)


**COVER:** Black Chemivic® synthetic rubber with double Orange Pliovic® outer helix

**REINFORCEMENT:** Synthetic fabric plies

**TEMPERATURE:** -40 °F to 160 °F (-40 °C to 71 °C)

**COUPLINGS:** Use Continental Contitech Insta-Lock Cam & Groove Fittings with this product.

**BRANDING:** INFINITY HD Drop Hose 150 psi Goodyear

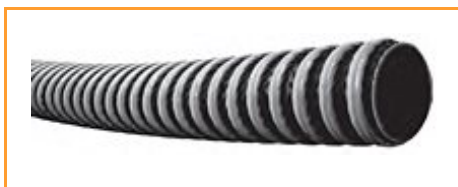

[Product Specifications](#) | [Specifications](#)

### Product Specifications

Type	Petroleum Transfer
Style	Petrol Transfer Hose
Construction Tube	Black Nitrile synthetic rubber (static dissipating)
Cover	Black Chemivic® synthetic rubber with double Orange Pliovic® outer helix
Reinforcement	Synthetic fabric plies

<b>Color</b>	Black
<b>Min. Temperature</b>	-40 °F -40 °C
<b>Max. Temperature</b>	160 °F 71 °C
<b>Max. Working Pressure</b>	150.0 psi 1.03 MPa
<b>Brand</b>	INFINITY™ HD FUEL DROP
<b>Order Code</b>	543-138

### Specifications

<b>I.D.</b>	3 in 76.00 mm
<b>Nom. O.D.</b>	3.800 in 95.90 mm
<b>Length</b>	100.000 ft
<b>Bend Radius</b>	2.000 in 50.80 mm
<b>Vacuum Rating</b>	23.000 inHg 584.00 mmHg
<b>Weight</b>	1.480 lb/ft 2.21 kg/m

[MideastUS@contitech.us](mailto:MideastUS@contitech.us)

1-800-235-4632

Contitech.us

**ContiTech**