



Item # 20439981, INFINITY HD Fuel Drop Hose 4 in x 100 ft, 150 PSI, Black

APPLICATION: Constructed with the exclusive PVC double helix for superior flexibility, abrasion resistance and low coefficient of friction for ease of maneuverability. Lightweight in construction, Infinity HD (Heavy Duty) is designed for higher working pressure applications (150 PSI). It is suitable in gravity flow or medium suction at ambient temperature. Designed to transfer biodiesel and ethanol blends, gasoline and other petroleum products with an aromatic content of 60% or less.

CONSTRUCTION TUBE: Black Nitrile synthetic rubber (static dissipating)


COVER: Black Chemivic® synthetic rubber with double Orange Pliovic® outer helix

REINFORCEMENT: Synthetic fabric plies

TEMPERATURE: -40 °F to 160 °F (-40 °C to 71 °C)

COUPLINGS: Use Continental Contitech Insta-Lock Cam & Groove Fittings with this product.

BRANDING: INFINITY HD Drop Hose 150 psi Goodyear

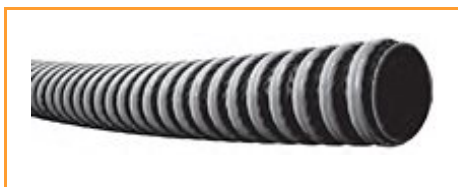

[Product Specifications](#) | [Specifications](#)

Product Specifications

Type	Petroleum Transfer
Style	Petrol Transfer Hose
Construction Tube	Black Nitrile synthetic rubber (static dissipating)
Cover	Black Chemivic® synthetic rubber with double Orange Pliovic® outer helix
Reinforcement	Synthetic fabric plies

Color	Black
Min. Temperature	-40 °F -40 °C
Max. Temperature	160 °F 71 °C
Max. Working Pressure	150.0 psi 1.03 MPa
Brand	INFINITY™ HD FUEL DROP
Order Code	543-138

Specifications

I.D.	4 in 102.00 mm
Nom. O.D.	4.800 in 122.50 mm
Length	100.000 ft
Bend Radius	3.000 in 76.20 mm
Vacuum Rating	23.000 inHg 584.00 mmHg
Weight	2.010 lb/ft 2.99 kg/m

MideastUS@contitech.us

1-800-235-4632

Contitech.us

ContiTech