



## Item # 20546328, EXTREMEFLEX PETROLEUM Transfer Hose 6 in x 100 ft , Black

**APPLICATION:** An extremely flexible and lightweight drop hose for use in tank truck and in-plant operation to transfer diesel, ethanol, gasoline, oil and petroleum base products up to 60% aromatic content. Corrugated construction for lower drag coefficient and superior abrasion resistance.

**CONSTRUCTION TUBE:** Black Nitrile synthetic rubber (Class A oil resistance)


**COVER:** Black Chemivic™ synthetic (corrugated)

**REINFORCEMENT:** Spiral plied synthetic fabric with wire helix

**TEMPERATURE:** -40 °F to 200 °F (-40 °C to 93 °C)

**COUPLINGS:** Use Continental Contitech Insta-Lock™ Cam & Groove Fittings.

**BRANDING (SPIRAL):** Example: Plicord® ExtremeFlex™ Petroleum Transfer

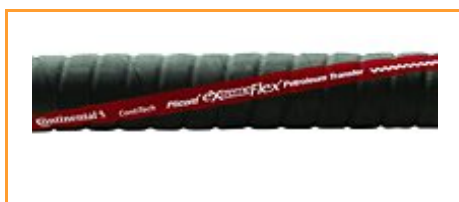

[Product Specifications](#) | [Specifications](#)

### Product Specifications

Type	Petroleum Transfer
Style	Petrol Transfer Hose
Construction Tube	Black Nitrile synthetic rubber (Class A oil resistance)
Cover	Black Chemivic™ synthetic (corrugated)
Reinforcement	Spiral plied synthetic fabric with wire helix
Color	Black

<b>Min. Temperature</b>	-40 °F -40 °C
<b>Max. Temperature</b>	200 °F 93 °C
<b>Max. Working Pressure</b>	150.0 psi 1.03 MPa
<b>Brand</b>	PLICORD® EXTREMEFLEX™
<b>Order Code</b>	543-216

### Specifications

<b>I.D.</b>	6 in 152.40 mm
<b>Nom. O.D.</b>	6.620 in
<b>Length</b>	200.000 ft
<b>Weight</b>	4.430 lb/ft

[MideastUS@contitech.us](mailto:MideastUS@contitech.us)  
1-800-235-4632  
Contitech.us

**ContiTech**