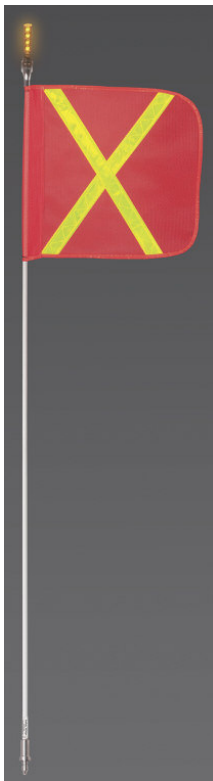


Powered Heavy Duty Fiberglass Whips, Quick Disconnect

DOC Rev.
10/30/15

Whip Height	Single Piece Quick Disconnect Whips			Two Piece Quick Disconnect Breakdown Whips		
	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag	Whip 11.5x11.5 Mesh Flag	Whip 11.5x11.5 "X" Flag	Whip 16x16 "X" Flag
5ft	SW05QD-M	SW05QD-SX	SW05QD-X	SW05QD2-M	SW05QD2-SX	SW05QD2-X
8ft	SW08QD-M	SW08QD-SX	SW08QD-X	SW08QD2-M	SW08QD2-SX	SW08QD2-X
10ft	SW10QD-M	SW10QD-SX	SW10QD-X	SW10QD2-M	SW10QD2-SX	SW10QD2-X
12ft	SW12QD-M	SW12QD-SX	SW12QD-X	SW12QD2-M	SW12QD2-SX	SW12QD2-X



SW05QD-XY w/ AL8CA



SW08QD2T-XY
Breakdown whip shown above with optional LED whip light



Whip Extensions Fiberglass
QD Mount Powered
Custom lengths available

Size	Part Numbers
1 ft	EXT-1QD
2 ft	EXT-2QD
3 ft	EXT-3QD
4 ft	EXT-4QD
6 ft	EXT-6QD

Standard Flags



FLAG11-O:
11.5 x 11.5 inch
Orange mesh flag





FLAG11-O-XY:
This 11.5 x 11.5 inch
Yellow mesh with
reflective yellow X



FLAG16-O-XY:
16x16 inch
Orange mesh
reflective X
in yellow

Common LED Whip Lights

Product Number					
Flashing	AL8FR	AL8FA	AL8FB	AL8FW	AL8FG
Constant	AL8CR	AL8CA	AL8CB	AL8CW	AL8CG

other flight options available

Whip Mounts

Powered, for Quick Disconnect Mount

Steel QD Mounts



Stainless Steel QD Mount
For quick disconnect whips,

a : SWQD-PT: wire in pigtail

b: SWQD-R: RCA Type
power connectorw/ RCA type pigtail

Heavy Duty Spring Mounts



Heavy Duty Spring Mount
Highly recommended to
help reduce whip breakage.

c : 519.309 Stainless Steel
d : 519.30B Zinc Plated Steel

Angle Bracket Mounts (ABM)



ABM: Angle Bracket Mount
Attach whips to toolbox, rack or
truck bed with this heavy duty
bracket.

Hitch Mount



HMQDA : Hitch Mount
with Quick-Connect Mount
and 107 dB Backup Alarm

other mount options available



USA 2115 W. Mountain View Rd., Phoenix, AZ 85021

www.SafetyWhips.com

Sales@SafetyWhips.com

CANADA 677 - 192 St. #107 Surrey, BC V3S 3X1

www.SafetyWhips.ca

Lugo@SafetyWhips.com

TEL 602-424.2500

FAX 602-424.9777

TEL 604-560.5080

FAX 604-560.5090