



SELECTION/DIMENSIONS

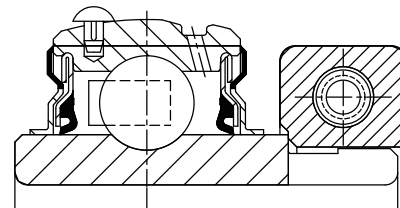

D-LOK® Ball Bearings DLM MEDIUM DUTY PILOTED FLANGE BEARINGS

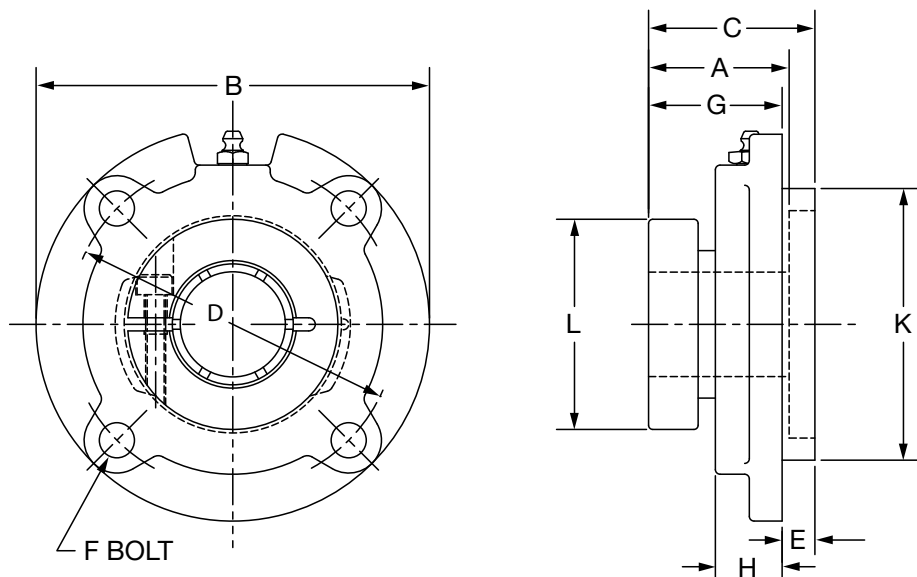

Series	Shaft Size	Standard	
		Part No.	Description
206	1	128855	FC-DLM-100
207	1-3/16	128856	FC-DLM-103
	1-1/4	128810	FC-DL-104
208	1-7/16	128857	FC-DLM-107
	1-1/2	128813	FC-DL-108
	35mm	053784	FC-DLM-35M
209	1-1/2	128858	FC-DLM-108L
	1-5/8	128814	FC-DL-110L
210	1-11/16	128859	FC-DLM-111
	1-3/4	128860	FC-DLM-112
211	1-15/16	128861	FC-DLM-115
	2	128862	FC-DLM-200
212	2-3/16	128863	FC-DLM-203
	2-1/4	128864	FC-DLM-204
214	2-7/16	128865	FC-DLM-207
	2-1/2	128866	FC-DLM-208
	65mm	126660	FC-DLM-65M
216	2-15/16	057475	FC-DLM-215
218	3-7/16	062373	FC-DLM-307

@ Assembled to order

SELECTION/DIMENSIONS



D-LOK® Ball Bearings DLM MEDIUM DUTY PILOTED FLANGE BEARINGS

Bearing Reference
Guide

ULTRA KLEEN

E-Z KLEEN

Extreme Duty

Setscrew Ball Bearing

GRIP TIGHT

D-LOK Ball Bearing

Series	Shaft Size	Weight lbs kg	A	B	C	D	E	F Bolt Dia.	G	H	K	L
206	1	3.1	1.56 39.6	4.38 111.3	1.57 39.9	3.63 92.2	0.25 6.4	3/8 M10	1.32 33.5	0.81 20.6	3.000/2.998 76.20/76.15	2.22 56.4
207	1-3/16 1-1/4	4.1 4.1	1.75 44.5	5.00 127.0	1.81 46.0	4.13 104.9	0.38 9.7	3/8 M10	1.44 36.6	0.84 21.3	3.375/3.373 85.73/85.67	2.69 68.3
208	1-7/16 1-1/2 35mm	5.1 4.9 2.6	2.01 <i>51.1</i>	5.25 <i>133.4</i>	2.05 <i>52.1</i>	4.38 <i>111.3</i>	0.44 <i>11.2</i>	7/16 <i>M12</i>	1.61 <i>40.9</i>	0.89 <i>22.6</i>	3.625/3.623 <i>92.08/92.02</i>	2.74 <i>69.6</i>
209	1-1/2 1-5/8	6.1 6.2	2.01 51.1	6.13 155.7	2.00 50.8	5.13 130.3	0.44 11.2	1/2 M12	1.57 39.9	1.00 25.4	4.250/4.248 107.95/107.90	2.99 75.9
210	1-11/16 1-3/4	6.2 6.2	2.01 51.1	6.13 155.7	2.05 52.1	5.13 130.3	0.47 11.9	1/2 M12	1.58 40.1	0.92 23.4	4.250/4.248 107.95/107.90	3.24 82.3
211	1-15/16 2	8.0 8.0	2.25 57.2	6.38 162.1	2.37 60.2	5.38 136.7	0.63 16.0	1/2 M12	1.75 44.5	1.00 25.4	4.500/4.498 114.30/114.25	3.69 93.7
212	2-3/16 2-1/4	11.6 11.6	2.38 60.5	7.13 181.1	2.60 66.0	6.00 152.4	0.88 22.4	1/2 M12	1.73 43.9	1.00 25.4	5.000/4.998 127.00/126.95	4.11 104.4
214	2-7/16 2-1/2 65mm	13.9 13.8 5.9	2.60 <i>66.0</i>	7.63 <i>193.8</i>	2.86 <i>72.6</i>	6.50 <i>165.1</i>	1.13 <i>28.7</i>	1/2 <i>M12</i>	1.73 <i>43.9</i>	1.06 <i>26.9</i>	5.500/5.498 <i>139.70/139.65</i>	4.38 <i>111.3</i>
216	2-15/16	18.8	2.62 <i>66.5</i>	8.75 <i>222.3</i>	3.26 <i>82.8</i>	7.50 <i>190.5</i>	1.25 <i>31.8</i>	5/8 <i>M16</i>	2.01 <i>51.1</i>	1.19 <i>30.2</i>	6.375/6.373 <i>161.93/161.87</i>	4.99 <i>126.7</i>
218	3-7/16	36.8	2.72 69.1	10.25 260.4	3.53 89.7	8.63 219.1	1.13 28.6	3/4 M18	2.40 61.0	1.63 41.4	7.375/7.373 187.33/187.27	5.49 139.4

FEATURES/BENEFITS PAGE B6-3	HOW TO ORDER/NOMENCLATURE PAGE B6-5	SELECTION/DIMENSIONS PAGE B6-10	ACCESSORIES PAGE B6-62
--------------------------------	--	------------------------------------	---------------------------