

Pro

ProConnect-PS 263/264/mw



FEATURES

- Unique pin and sleeve design prevents accidental mating of non-marine rated devices.
- Available mating metal or non-metallic plugs with integral threaded ring maintain a watertight seal.
- Neoprene gaskets resist petroleum.
- Water shedding inverted mounting style.
- Reverse service feed available.
- Extended cover provides additional wiring capacity.
- Cast marine brass or copper free aluminum construction available.
- Captive threaded receptacle cap.
- Optional double pole rotary switch combinations.
- Heavy duty mounting pads.
- Silicone lubricant provided for cover screws and flange.
- Available in 125v AC up to 600v AC.
- 2P3W or 3P4W units available.
- 125v AC 20 Amp ANSI NEMA adapter plug available.

APPLICATIONS

- Marine and watertight requirements

APPROVALS

- Conforms to IP66
- ABS

TECHNICAL SPECIFICATIONS

BOX/COVER

Cast marine brass or copper free aluminum.

CAP/RING

Marine brass or zinc plated brass.

PLUG BODY/RING

Cast marine brass, zinc plated brass or Acrylonitrile Butadiene Styrene/Polycarbonate blend (ABS+PC).

HARDWARE

Stainless steel.

GASKETS

One piece neoprene.

RECEPTACLE/PLUG INTERIOR

Acrylonitrile Butadiene Styrene/Polycarbonate blend (ABS+PC).

PIN AND SLEEVES

Free machining brass.

ENTRIES

Standard units undrilled. Up to 3/4" NPT through feed available. See ENTRY OPTIONS for selections.

VOLTAGE AND CURRENT

RECEPTACLE

125v AC, 20 Amp max
208v AC, 20 Amp max
250v AC, 20 Amp max
277v AC, 20 Amp max
480v AC, 20 Amp max
600v AC, 20 Amp max

VOLTAGE AND CURRENT

SWITCH

20 Amp 120/240v AC
1 HP at 120v AC or 2 HP at 240v AC

MOUNTING

Surface via two/three, or flush via four, 1/4" bolts (not included).

ORDERING REFERENCES

PART NUMBER		DESCRIPTION	WEIGHT LBS
TYPE 2P3W	TYPE 3P4W		
2632B-125	2633B-125	BRASS, One Receptacle, Surface Mount	3.2
2634B-125	2635B-125	BRASS, Two Receptacles, Surface Mount	4.9
2636B-125	2637B-125	BRASS, Three Receptacles, Surface Mount	6.7
2640B-125	2641B-125	BRASS, One Receptacle with Double Pole Switch, Surface Mount	4.9
2634BF-125	2635BF-125	BRASS, Two Receptacles, Flush Mount	7.0
2640BF-125	2641BF-125	BRASS, One Receptacle with Double Pole Switch, Flush Mount	7.0
2632A-125	2633A-125	ALUMINUM, One Receptacle, Surface Mount	1.2
2634A-125	2635A-125	ALUMINUM, Two Receptacles, Surface Mount	2.3
420BP-125	420-4BP-125	PLUG, Metal	0.8
420PP-125	420-4PP-125	PLUG, Plastic	0.3

SPECIAL OPTIONS

-208*	- 208V (3P4W only)
-250*	- 250v
-277*	- 277v (2P3W only)
-480*	- 480v
-600*	- 600v (3P4W only)
RS	- Reverse Service (Single gang only)

*Replace -125 in part number.

ENTRY OPTIONS

NPT Trade Size	Dead End	Thru Feed
1/2"	E1	C1
3/4"	E2	C2

SPARE PARTS


Part No.	Description		
INX6532B	COVER, BRASS, One Receptacle	GKT5002	COVER GASKET, One Receptacle
INX6533B	COVER, BRASS, Two Receptacles	GKT6007	COVER GASKET, Two Receptacles or One with Switch
INX6534B	COVER, BRASS, Three Receptacles	GKT5022	COVER GASKET, Three Receptacles
INX6535B	COVER, BRASS, One Receptacle with Switch	GKT5029	BOX GASKET, One Receptacle
INX6532A	COVER, ALUMINUM, One Receptacle	GKT5030	BOX GASKET, Two Receptacles or One with Switch
INX6019B	FLUSH MOUNT BOX, BRASS, Two Receptacles or One with Switch	INX8002B	KNOB AND SHAFT ASSEMBLY, Brass
INX6015B	SURFACE MOUNT BOX, BRASS, One Receptacle	INX8004B	CAP WITH GASKET, Brass
INX6016B	SURFACE MOUNT BOX, BRASS, Two Receptacles or One with Switch	INX8004A	CAP WITH GASKET, Aluminum
INX6017B	SURFACE MOUNT BOX, BRASS, Three Receptacles	INX3192	SWITCH
INX6015A	SURFACE MOUNT BOX, ALUMINUM, One Receptacle	INX3022-125*	INTERIOR, 2P3W, Receptacle
INX6016A	SURFACE MOUNT BOX, ALUMINUM, Two Receptacles or One with Switch	INX3143-125*	INTERIOR, 2P3W, Metal Plug
INX3242PR-125	RECEPTACLE ADAPTER, 2P3W 125V to 5-20R	INX3103-125*	INTERIOR, 2P3W, Plastic Plug
INX3242PR-250	RECEPTACLE ADAPTER, 2P3W 125V to 6-20R	INX3023-125*	INTERIOR, 3P4W, Receptacle
		INX3147-125*	INTERIOR, 3P4W, Metal Plug
		INX3105-125*	INTERIOR, 3P4W, Plastic Plug

*NOTE

Change "-125" suffix to 208, 250 277, 480 or 600 for voltage needed.

ProConnect-PS 263/264/mw

DIMENSIONS

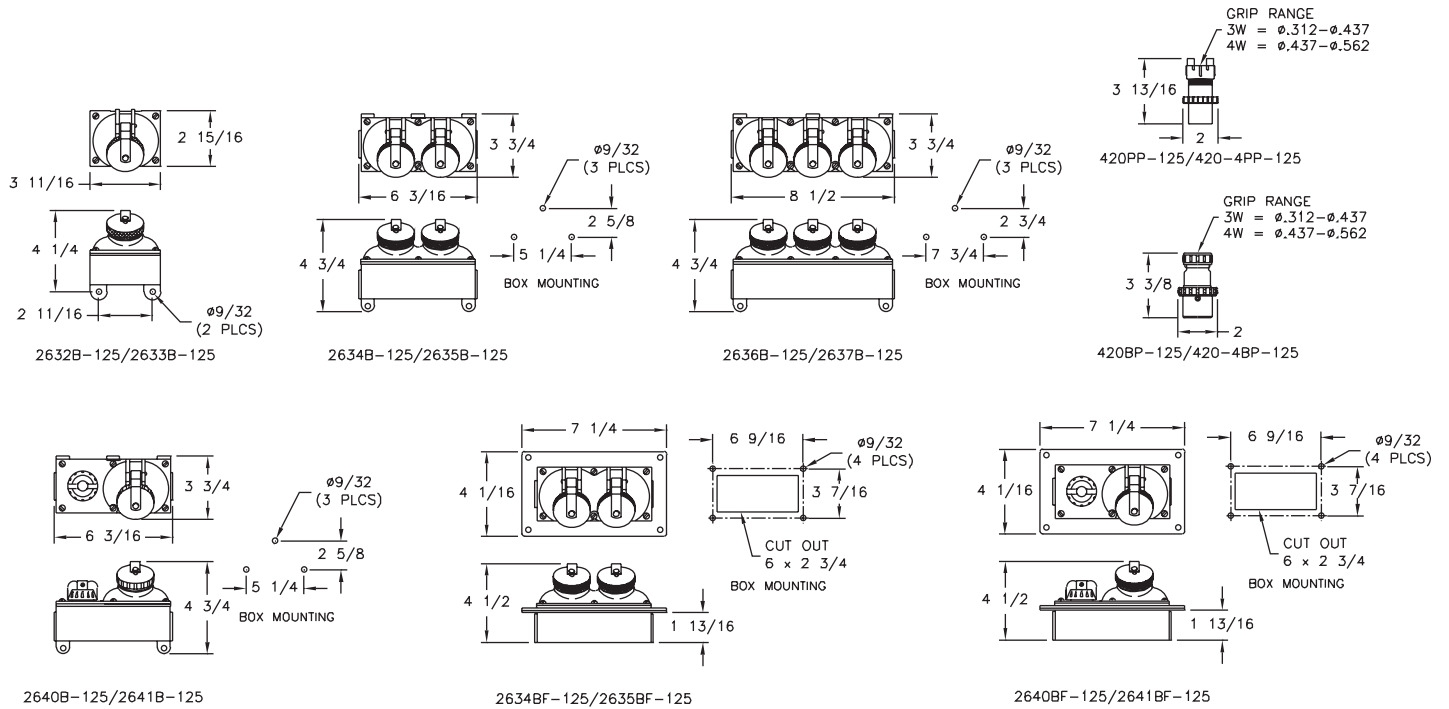

Dimensions in inches

NOTES