

NBR Arktite® Interlocked Receptacles with Enclosed Circuit Breakers

NEMA 3, 3R, 4*, 4X*, 12
Watertight
Corrosion-Resistant

3P

APJ/NPJ Arktite Plugs

Applications:

NBR Arktite interlocked receptacles with enclosed circuit breakers are used:

- To supply power and provide short circuit protection, thermal overload protection, and a disconnect means for portable electrical equipment such as motor generator sets, compressors, conveyors, and other similar equipment
- In locations where corrosion is present such as in offshore and marine locations, pulp and paper mills, chemical plants, food processing, and sewage treatment plants
- Indoors and outdoors in damp, wet or hosedown locations

Features:

- Enclosures are made of Krydon® high impact strength fiberglass-reinforced polyester material having excellent resistance to corrosion and heat
- Receptacles are mechanically interlocked with circuit breakers which provide a disconnect means, short circuit protection, and thermal time delay overload protection
- For maximum safety, the spring door receptacle at the bottom is mechanically interlocked with the circuit breaker operating mechanism. The circuit breaker cannot be closed until the plug is fully inserted and the plug cannot be withdrawn unless the breaker is open
- Enclosure has hinged access door for easy wiring and maintenance. Three screws, hidden behind access door in door frame, prevent disassembly when door is locked
- Enclosure access door is mechanically interlocked with operating handle and cannot be opened unless operating handle operator is in "OFF" position
- A Krydon material hub (not mounted) is supplied with each enclosure as follows:

Rating	Hub Size (In.)	Cat. #
30A	3/4	NHUB2
60A	1 1/4	NHUB4
100A	2	NHUB6

For alternate hub sizes, see page 677

- Receptacle has self-closing spring door assembly to provide environmental protection
- Operating handle can be padlocked in "OFF" position. Breaker is trip-free of handle and will open under short circuit or overload when handle is in the "ON" position
- Provided with top and bottom mounting feet which may be rotated 90° to vertical or horizontal mounting positions

Certifications and Complies:

- NEMA 3, 3R, 4*, 4X*, 12
- ANSI/UL Standard: 489
- UL Standard: 1682
- CSA

Standard Materials:

- Enclosure, covers and operating handles – Krydon fiberglass-reinforced polyester material
- Operating shafts – stainless steel
- Receptacle housings – copper-free aluminum
- Receptacle insulators – Krydon material
- Crimp/solder contacts – leaded red brass

Standard Finishes:

- Copper-free aluminum – baked on powder epoxy
- Stainless steel – natural
- Enclosure – natural
- Receptacle insulators – natural (red)
- Brass – natural
- Leaded red brass – electro-tin-plated

Electrical Rating Range:

- Receptacles – 30, 60 and 100 amperes
- Circuit Breakers – 100 ampere frame size

Note: For additional dimensional data, see page 510, enclosure catalog number NCB1024.

Options:

Description	Suffix
Special polarity – for use where two or more receptacles of the same ampere rating, style and number of poles are to be installed on the same premises for use of different voltages. Receptacle interior rotated 22½° to right (viewed from face) and plug changed to match Hubs for other conduit sizes can be supplied. See page 677.	S4



Interchangeability of Plugs With Other Non-hazardous and Hazardous Location Receptacles:

- Plugs listed for use with NBR assemblies are standard Arktite APJ/NPJ plugs. Other standard APJ/NPJ and CPH plugs of the same rating, style and number of poles may be used with NBR receptacles, as well as EBBR, EPC and EPCB receptacles listed in Section 4P
- Portable equipment, suitable for the locations and equipped with the proper plug, can be used with non-hazardous rated AR receptacles, DBR and WSR interlocked receptacles located in non-hazardous locations, with EBBR, EPC and EPCB receptacles for Class I, Groups B, C, D hazardous locations, with DR and DBR interlocked receptacles for Class II, Groups F, G hazardous locations, and with NBR/NSR interlocked receptacles for wet and corrosive locations

*30 and 60A Style 2 only.



3P

NBR Arktite® Interlocked Receptacles with Enclosed Circuit Breakers

3-Pole, 600 VAC
NEMA 3, 3R, 4, 4X, 12
Watertight
Corrosion-Resistant

APJ/NPJ Arktite Plugs▲

100 Ampere Frame Size with Non-interchangeable Trip†§

Receptacle With Spring Door Housing	Hub Size (In.)	Ckt. Brkr. Amps	Without Circuit Breaker Cat. #	With Cutler-Hammer Circuit Breaker Cat. #
Style 1†				
30 amp., 3-wire, 3-pole	¾	20	NBR53731	NBR53731 WT20 3
		30		NBR53731 WT30 3
		40		NBR53731 WT40 3*
		50		NBR53731 WT50 3*
60 amp., 3-wire, 3-pole	1¼	50	NBR56731	NBR56731 WT50 3
		60		NBR56731 WT60 3
		70		NBR56731 WT70 3*
		90		NBR56731 WT90 3*
100 amp., 3-wire, 3-pole	2	100	NBR51731	NBR51731 WT100 3*
		60		NBR51731 WT60 3
		70		NBR51731 WT70 3
		90		NBR51731 WT90 3
30 amp., 3-wire, 4-pole	¾	20	NBR53742	NBR53742 WT20 3
		30		NBR53742 WT30 3
		40		NBR53742 WT40 3*
		50		NBR53742 WT50 3*
60 amp., 3-wire, 4-pole	1¼	50	NBR56742	NBR56742 WT50 3
		60		NBR56742 WT60 3
		70		NBR56742 WT70 3*
		90		NBR56742 WT90 3*
100 amp., 3-wire, 4-pole	2	100	NBR51742	NBR51742 WT100 3*
		60		NBR51742 WT60 3
		70		NBR51742 WT70 3
		90		NBR51742 WT90 3

*Circuit breaker trip rating may exceed receptacle rating for welding equipment applications only, as higher trip rating may not protect wiring.


†Style 1 – Grounded through shell. Style 2 – Grounded through extra pole and shell. For a detailed description of these grounding methods, see page 1314.

§Also available with interchangeable trip breakers. Specify on order.

‡ For detailed information on circuit breaker selection, see Section 3C.

▲ Pressure connectors are standard. Crimp/solder type terminators are optionally available for 3 and 4-pole 30, 60 and 100 ampere. For details, see page 1316. To specify, add the suffix "T" to the catalog number. For example: APJ3375-T (Plug).

Dimensions (In Inches):

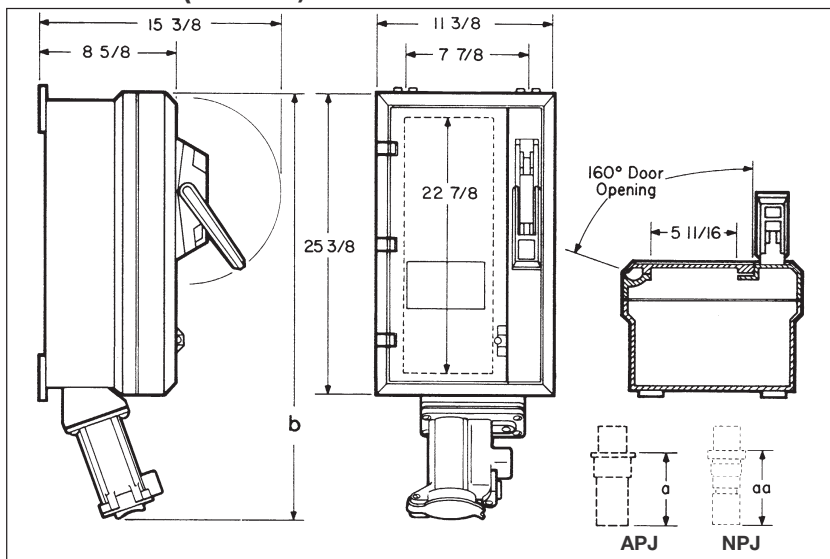

APJ/NPJ Plugs

600 VAC
With Cable Grip and Neoprene Bushing



APJ



NPJ

Amps	Cable O.D. Range	Style 1† 3-wire, 3-pole Cat. #	Style 2† 3-wire, 4-pole Cat. #
30	0.60 to 1.20	APJ3375	APJ3485
	0.55 to 0.70		NPJ3483
	0.70 to 0.85		NPJ3484
60	0.75 to 1.45	APJ6375	APJ6485
	0.75 to 1.07		NPJ6484
	1.07 to 1.35		NPJ6485
100	1.00 to 1.70	APJ10377	APJ10487
	0.93 to 1.21		NPJ10486
	1.21 to 1.50		NPJ10487

Amps	b	a	aa
30	31 ³ / ₈	4 ¹³ / ₁₆	7
60	33	5 ¹³ / ₁₆	6 ¹³ / ₁₆
100	33 ³ / ₄	6 ⁵ / ₈	7 ³ / ₄

Dim. "a" and "aa" are exposed portion of plug when engaged with receptacle.

Crouse-Hinds
by **E.T.N.**