

## Tender Text



Product photo could vary from the actual product

Product No.: [31595155](#)

### 7S07-15

Multi-stage submersible pump for raw water supply, groundwater lowering and pressure boosting. The pump is suitable for pumping clean, thin, non-aggressive liquids without solid particles or fibers.

The pump is made entirely of Stainless steel DIN W.-Nr. DIN W.-Nr. 1.4301 and suitable for horizontal and vertical installation. The pump is fitted with a built-in non-return valve.

The motor is a 1-phase motor of the canned type with a sand shield, liquid-lubricated bearings and pressure-equalizing diaphragm.

### Liquid:

Pumped liquid: Water  
Maximum liquid temperature: 104 °F  
Max liquid temperature at 0.15 m/sec: 104 °F  
Liquid temperature during operation: 68 °F  
Density: 62.29 lb/ft<sup>3</sup>

### Technical:

Speed for pump data: 3450 rpm  
Shaft seal for motor: LIPSEAL  
Approvals on nameplate: CE,EAC,CSACOMP,UR  
Curve tolerance: ISO9906:2012 3B

### Materials:

Pump: Stainless steel  
DIN W.-Nr. 1.4301  
AISI 304  
Impeller: Stainless steel  
DIN W.-Nr. 1.4301  
AISI 304  
Motor: Stainless steel  
1.4301 EN  
AISI 304

### Installation:

Pump outlet: 1"NPT  
Motor diameter: 4 inch

### Electrical data:

Motor type: MS402



**Company name:**

**Created by:**

**Phone:**


**Date:**

2/22/2018

Type of motor: RSIR  
Rated power - P2: 0.75 HP  
Power (P2) required by pump: 1.126 HP  
Main frequency: 60 Hz  
Rated voltage: 1 x 230 V  
Service factor: 1,5  
Rated current: 8.4 A  
Cos phi - power factor: 0,75  
Rated speed: 3450 rpm  
Start. method: direct-on-line  
Enclosure class (IEC 34-5): IP68  
Insulation class (IEC 85): B  
Built-in temperature transmitter: No

**Others:**

Net weight: 29.8 lb  
Gross weight: 33.1 lb

Position	Count	Description
	1	<p><b>7S07-15</b></p>  <p>Product photo could vary from the actual product</p> <p>Product No.: <a href="#">31595155</a></p> <p>Multi-stage submersible pump for raw water supply, groundwater lowering and pressure boosting. The pump is suitable for pumping clean, thin, non-aggressive liquids without solid particles or fibers.</p> <p>The pump is made entirely of Stainless steel DIN W.-Nr. DIN W.-Nr. 1.4301 and suitable for horizontal and vertical installation. The pump is fitted with a built-in non-return valve.</p> <p>The motor is a 1-phase motor of the canned type with a sand shield, liquid-lubricated bearings and pressure-equalizing diaphragm.</p> <p><b>Liquid:</b></p> <p>Pumped liquid: Water</p> <p>Maximum liquid temperature: 104 °F</p> <p>Max liquid temperature at 0.15 m/sec: 104 °F</p> <p>Liquid temperature during operation: 68 °F</p> <p>Density: 62.29 lb/ft³</p> <p><b>Technical:</b></p> <p>Speed for pump data: 3450 rpm</p> <p>Shaft seal for motor: LIPSEAL</p> <p>Approvals on nameplate: CE,EAC,CSACOMP,UR</p> <p>Curve tolerance: ISO9906:2012 3B</p> <p><b>Materials:</b></p> <p>Pump: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Impeller: Stainless steel DIN W.-Nr. 1.4301 AISI 304</p> <p>Motor: Stainless steel 1.4301 EN AISI 304</p> <p><b>Installation:</b></p> <p>Pump outlet: 1"NPT</p> <p>Motor diameter: 4 inch</p> <p><b>Electrical data:</b></p> <p>Motor type: MS402</p> <p>Type of motor: RSIR</p> <p>Rated power - P2: 0.75 HP</p>



Company name:

Created by:


Phone:

Date:





2/22/2018

Position	Count	Description
		Power (P2) required by pump: 1.126 HP Main frequency: 60 Hz Rated voltage: 1 x 230 V Service factor: 1,5 Rated current: 8.4 A Cos phi - power factor: 0,75 Rated speed: 3450 rpm Start. method: direct-on-line Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): B Built-in temperature transmitter: No  <b>Others:</b> Net weight: 29.8 lb Gross weight: 33.1 lb

## 31595155 7S07-15 60 Hz

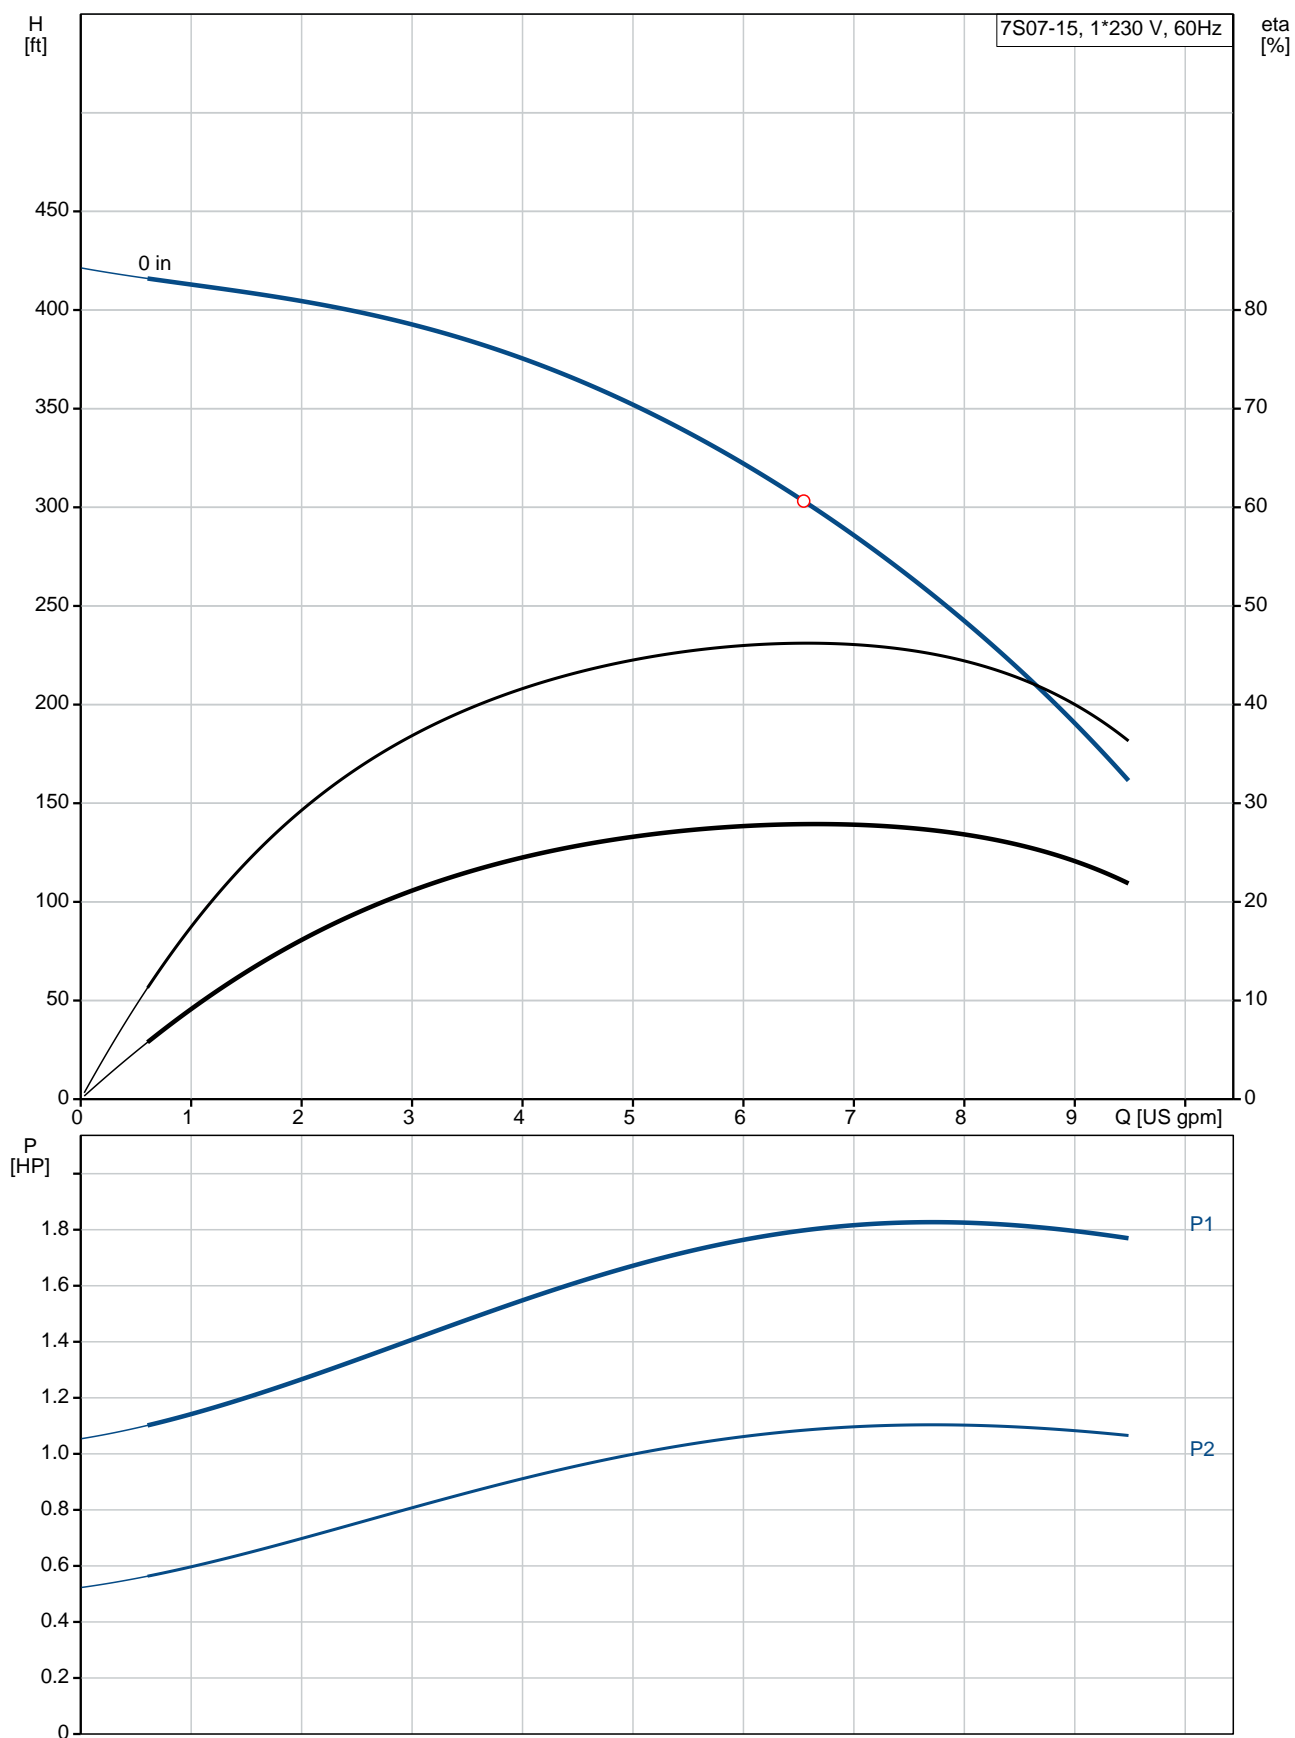

Description	Value
<b>General information:</b>	
Product name:	7S07-15
Product No.:	31595155
EAN:	5700394507691
<b>Technical:</b>	
Speed for pump data:	3450 rpm
Stages:	15
Shaft seal for motor:	LIPSEAL
Approvals on nameplate:	CE,EAC,CSACOMP,UR
Curve tolerance:	ISO9906:2012 3B
Pump Number:	3010015
Model:	A
Valve:	pump with built-in non-return valve
<b>Materials:</b>	
Pump:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Impeller:	Stainless steel DIN W.-Nr. 1.4301 AISI 304
Motor:	Stainless steel 1.4301 EN AISI 304
<b>Installation:</b>	
Pump outlet:	1"NPT
Motor diameter:	4 inch
<b>Liquid:</b>	
Pumped liquid:	Water
Maximum liquid temperature:	104 °F
Max liquid temperature at 0.15 m/sec:	104 °F
Liquid temperature during operation:	68 °F
Density:	62.29 lb/ft³
<b>Electrical data:</b>	
Motor type:	MS402
Type of motor:	RSIR
Applic. motor:	NEMA
Rated power - P2:	0.75 HP
Power (P2) required by pump:	1.126 HP
KVA code:	N
Main frequency:	60 Hz
Rated voltage:	1 x 230 V
Service factor:	1,5
Rated current:	8.4 A
Cos phi - power factor:	0,75
Rated speed:	3450 rpm
Start. method:	direct-on-line
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	B
Motor protection:	CONTACT
Thermal protec:	internal
Built-in temperature transmitter:	No
Motor Number:	79952103

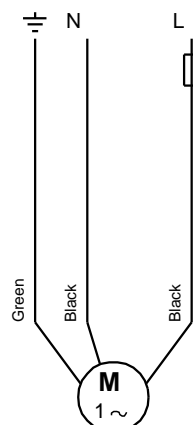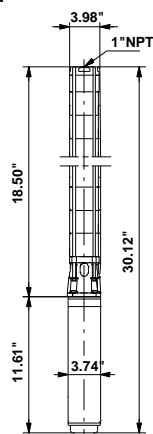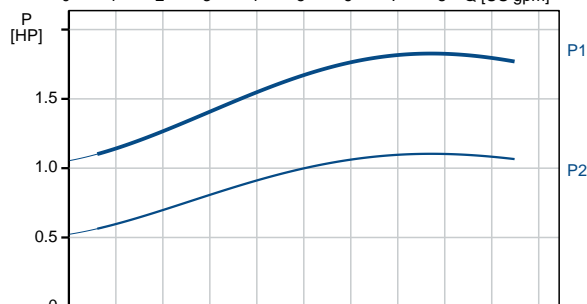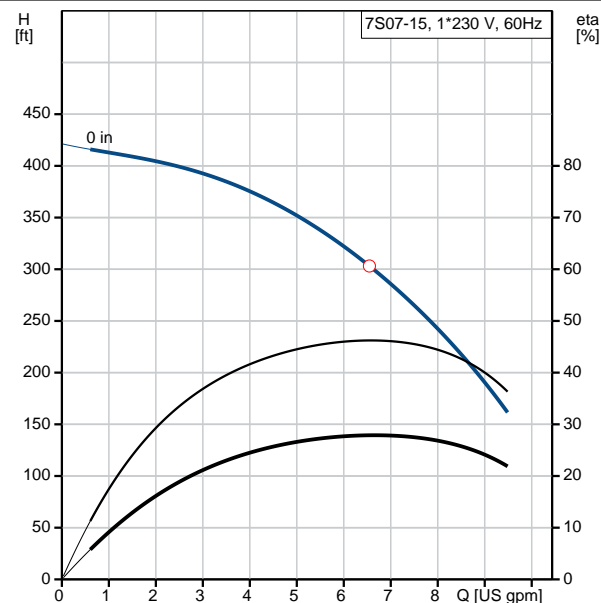



Company name:


Created by:

Phone:

Date: 2/22/2018


Description	Value
<b>Others:</b>	
Net weight:	29.8 lb
Gross weight:	33.1 lb
Sales region:	Namreg

## 31595155 7S07-15 60 Hz

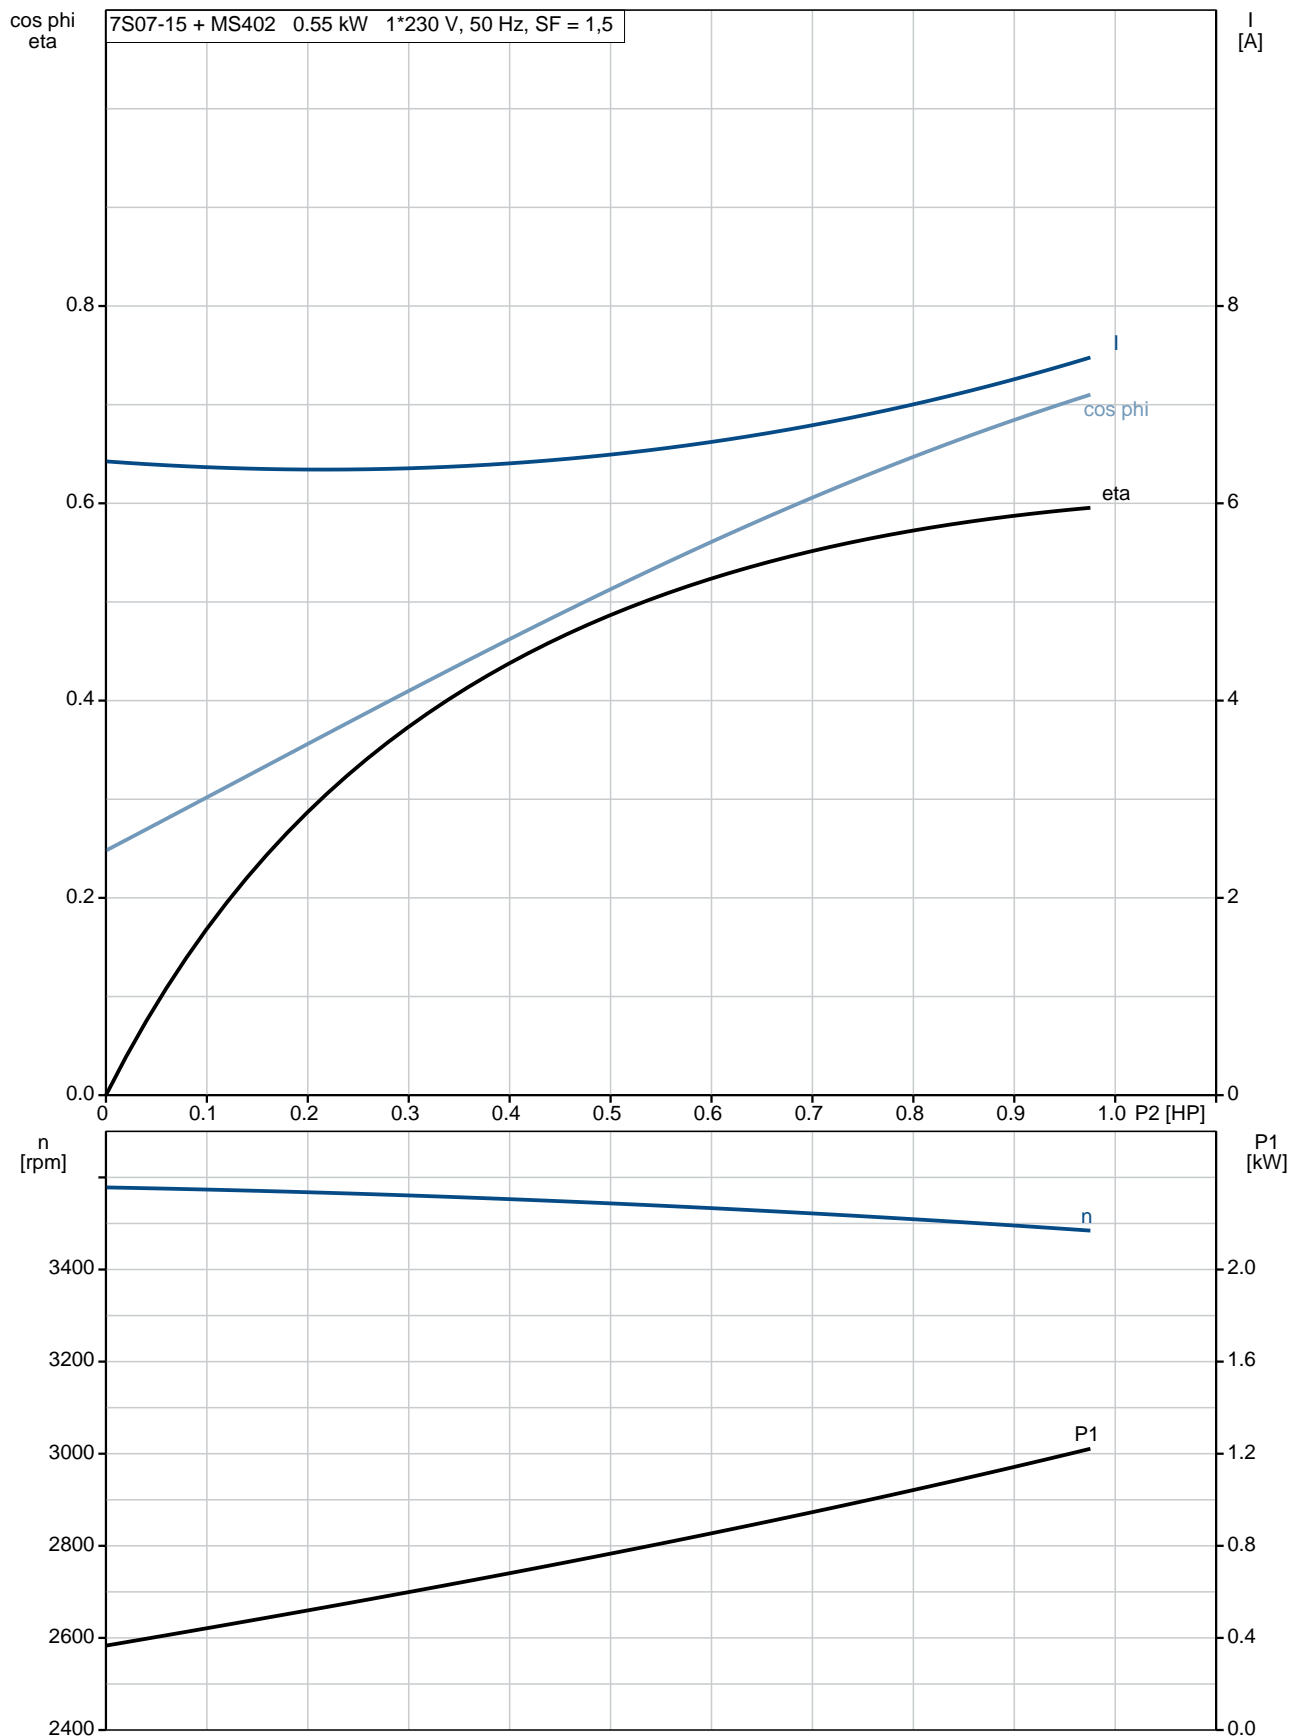




31595155 7S07-15 60 Hz

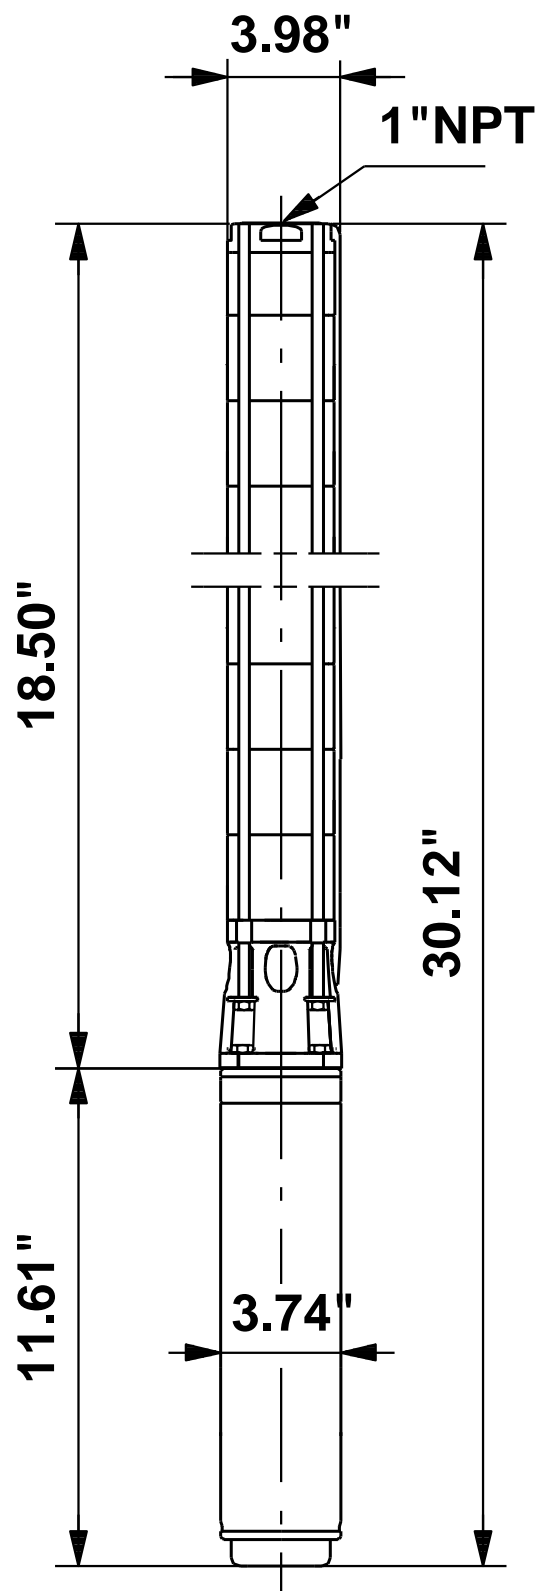

Note! All units are in [mm] unless otherwise stated.  
Disclaimer: This simplified dimensional drawing does not show all details.

31595155 7S07-15 60 Hz

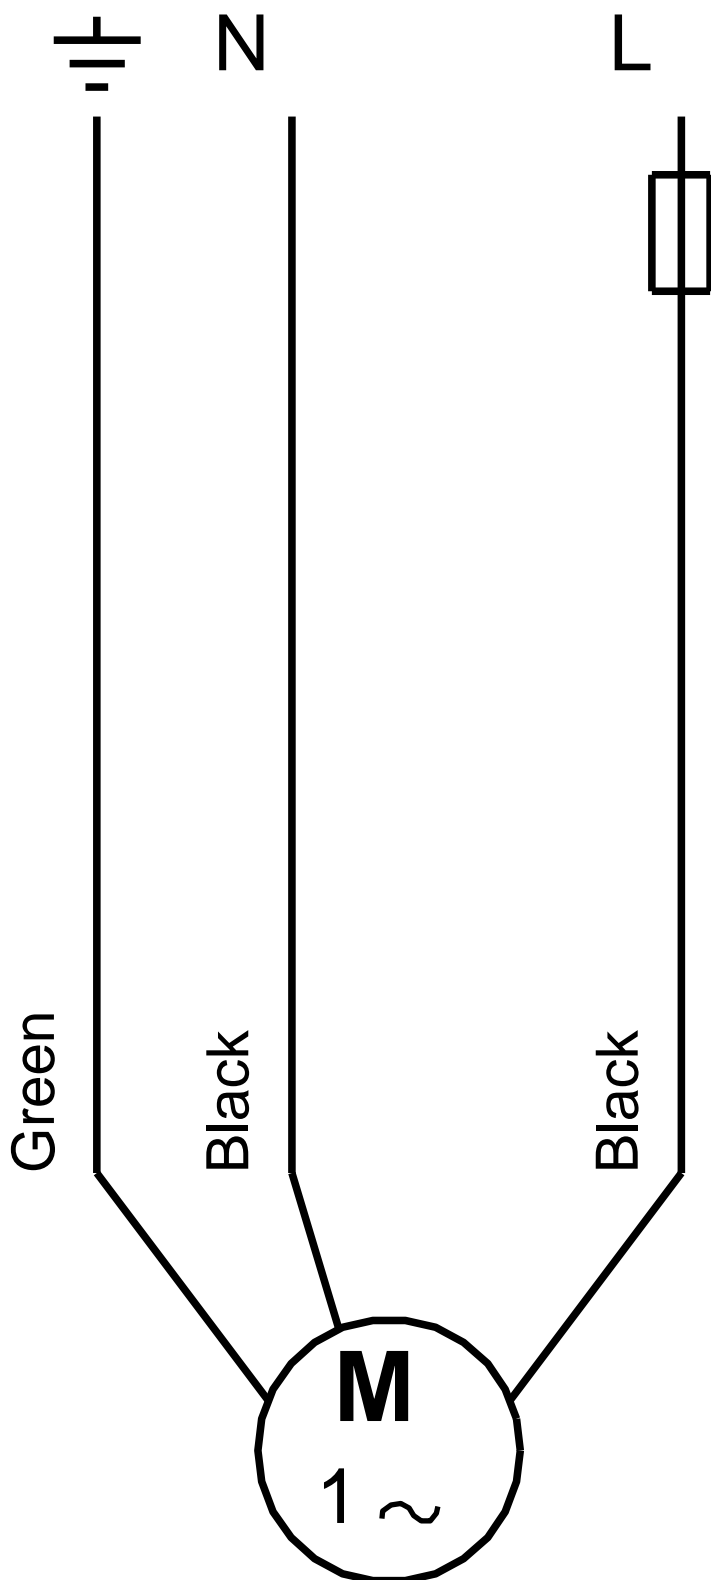

All units are [mm] unless otherwise presented.



Company name:

Created by:

Phone:

Date:

2/22/2018

---

**Order Data:**

Product name: 7S07-15

Amount: 1

Product No.: 31595155

Total: Price on request

---