

**Qty. Description**

1 DDA 7.5-16



Note! Product picture may differ from actual product

Product No.: [97722379](#)

DDA 7.5-16 AR-PV/E/C-F-32U7U7B

The SMART Digital DDA is a compact positive displacement, diaphragm dosing pump with variable-speed drive (stepper motor) and intelligent control electronics with minimum energy consumption. The SMART Digital Dosing series operates at full stroke length to ensure optimum accuracy, priming and suction, even for high-viscosity or degassing liquids. The duration of each discharge stroke varies according to the capacity set, resulting in optimum smooth and continuous discharge flow.

The click-stop mounting plate allows installation in three different positions without using any additional accessories. The control cube can be turned easily into front, left or right position. The click wheel and the multi-coloured backlit graphical, plain-text LC display make commissioning and operation intuitive. The control elements are protected by a transparent cover.

The dosing head is composed of:

- Long lifetime and universal, chemically resistant full-PTFE diaphragm.
- Double ball valves for highest dosing accuracy.
- Deaeration valve for easy start-up.

Operation modes:

- Manual dosing in ml/h, l/h or gph.
- Pulse control in ml/pulse (incl. memory function).
- Analog control 0/4-20 mA (scalable).
- Pulse-based batch function in ml, l or gal.
- Timer-based batch function (Dosing timer, cycle or week).
- Fieldbus control (Genibus prepared for ProfibusDP E-box).

Other features:

- Auto deaeration during pump standby to avoid breakdowns due to air-locking.
- Two SlowMode steps (anti-cavitation), 50 % (maximum flow: 3.75 l/h) and 25 % (maximum flow: 1.88 l/h), e.g. for high-viscosity or degassing liquids.
- Service information display to show when service and which wear-part order number is required.
- Two-step key lock function to protect the pump against unauthorised access.
- Additional display function to provide further information, e.g. the actual mA input signal.
- Counter for total dosed volume (resettable), operating hours, etc.
- Save and load customised settings as well as reload of factory settings.

Signal inputs/outputs:

- Input for pulse, analog 0/4-20mA, external stop.
- Input for low-level and empty-tank signal.
- Two potential-free output relays for max. 30 V AC/DC (configurable, e.g. alarm, stroke signal, pump dosing, timer etc.)
- Output analog 0/4-20mA.
- Fieldbus communication interface (GeniBus, also for additional Profibus DP E-box to retrofit).


**Technical:**

Type key:



DDA 7.5-16 AR-PV/E/C-F-32U7U7B

Qty.	Description
	<p> Max. Flow: 7.5 l/h  Max. flow in slow mode 50%: 3.75 l/h  Max. flow in slow mode 25%: 1.88 l/h  Min flow: 2.5 ml/h  Turn-down ratio: 1:3000  Approvals on nameplate: CE,CSA-US,NSF61,RCM  Valve type: Spring-Loaded (HV-version)  Maximum viscosity at 100 %: 600 mPas  Maximum viscosity in slow mode 50 %: 1800 mPas  Maximum viscosity in slow mode 25 %: 2500 mPas  Accuracy of repeatability: 1 % </p> <p> <b>Materials:</b>  Dosing head: PVDF (Polyvinylidene fluoride)  Valve ball: Ceramic  Gasket: EPDM </p> <p> <b>Installation:</b>  Range of ambient temperature: 0 .. 45 °C  Maximum operating pressure: 16 bar  Installation set: NO  Installation type: No installation set  Pump inlet: 0.17x 1/4, 1/4x3/8, 3/8x1/2"  Pump outlet: 0.17x 1/4, 1/4x3/8, 3/8x1/2"  Max. Suction lift during operation: 6 m  Max. Suction lift during priming: 2 m </p> <p> <b>Liquid:</b>  Pumped liquid: Water  Liquid temperature range: -10 .. 45 °C  Selected liquid temperature: 20 °C  Density at selected liquid temperature: 998.2 kg/m<sup>3</sup> </p> <p> <b>Electrical data:</b>  Maximum power input - P1: 24 W  Mains frequency: 50 Hz  Rated voltage: 1 x 100-240 V  Enclosure class (IEC 34-5): IP65 / NEMA 4X  Length of cable: 1.5 m  Type of cable plug: USA, Canada  Inrush current: 25A at 230V for 2ms </p> <p> <b>Controls:</b>  Control variant: AR  Level control: YES  Analog input: 0/4-20 MA  Pulse control: YES  Ext. Stop input: YES  Analog output: 0/4-20 MA  Output relays: 2  Bus communication: YES </p> <p> <b>Others:</b>  Net weight: 3 kg  Gross weight: 4 kg  Color: RED </p>

## 97722379 DDA 7.5-16 50 Hz

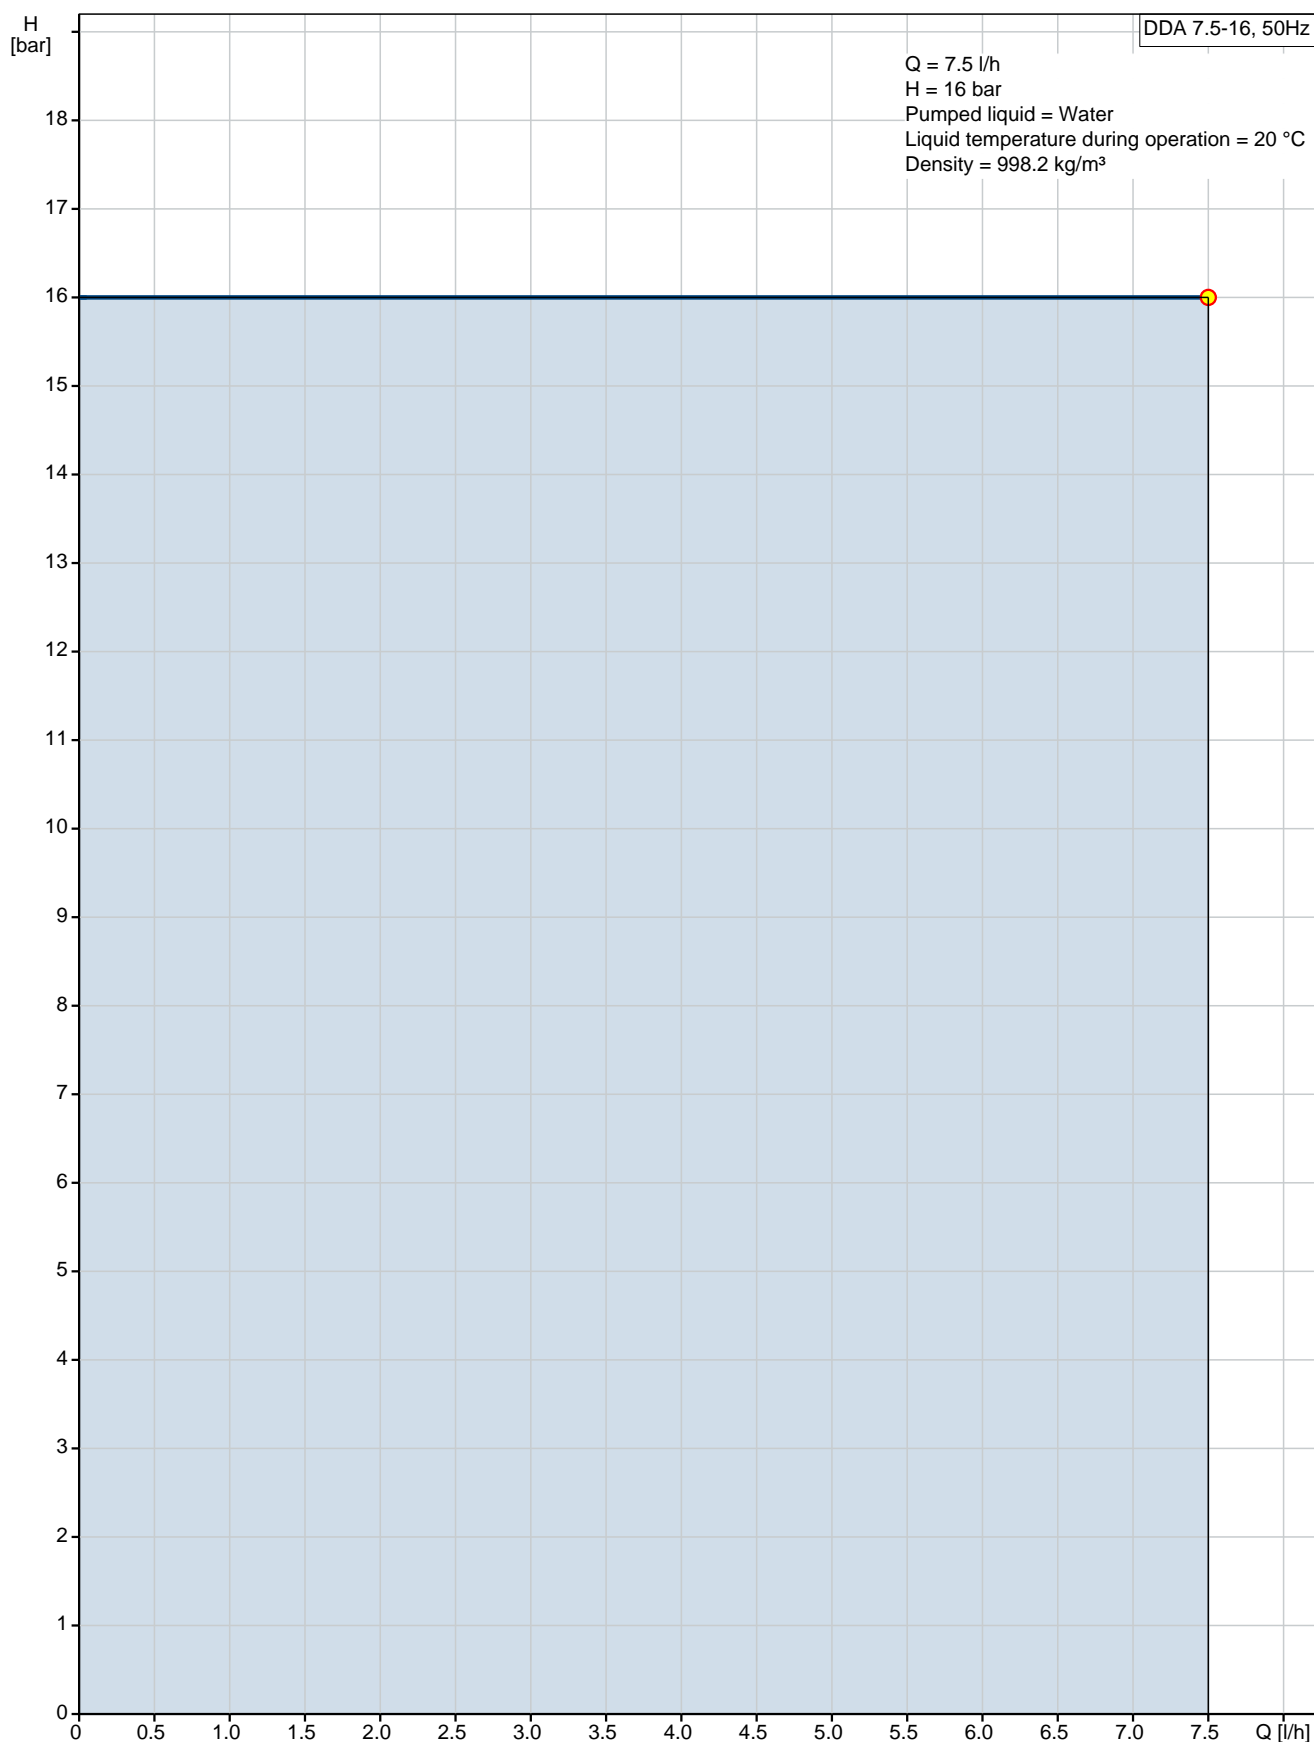

Description	Value
<b>General information:</b>	
Product name:	DDA 7.5-16
Product No:	97722379
EAN number:	5710622725216
<b>Technical:</b>	
Type key:	DDA 7.5-16 AR-PV/E/C-F-32U7U7B
Max. Flow:	7.5 l/h
Max. flow in slow mode 50%:	3.75 l/h
Max. flow in slow mode 25%:	1.88 l/h
Min flow:	2.5 ml/h
Turn-down ratio:	1:3000
Approvals on nameplate:	CE, CSA-US, NSF61, RCM
Valve type:	Spring-Loaded (HV-version)
Maximum viscosity at 100 %:	600 mPas
Maximum viscosity in slow mode 50 %:	1800 mPas
Maximum viscosity in slow mode 25 %:	2500 mPas
Accuracy of repeatability:	1 %
<b>Materials:</b>	
Dosing head:	PVDF (Polyvinylidene fluoride)
Valve ball:	Ceramic
Gasket:	EPDM
<b>Installation:</b>	
Range of ambient temperature:	0 .. 45 °C
Maximum operating pressure:	16 bar
Installation set:	NO
Installation type:	No installation set
Pump inlet:	0.17x 1/4, 1/4x3/8, 3/8x1/2"
Pump outlet:	0.17x 1/4, 1/4x3/8, 3/8x1/2"
Max. Suction lift during operation:	6 m
Max. Suction lift during priming:	2 m
<b>Liquid:</b>	
Pumped liquid:	Water
Liquid temperature range:	-10 .. 45 °C
Selected liquid temperature:	20 °C
Density at selected liquid temperature:	998.2 kg/m³
<b>Electrical data:</b>	
Maximum power input - P1:	24 W
Mains frequency:	50 Hz
Rated voltage:	1 x 100-240 V
Enclosure class (IEC 34-5):	IP65 / NEMA 4X
Length of cable:	1.5 m
Type of cable plug:	USA, Canada
Inrush current:	25A at 230V for 2ms
<b>Controls:</b>	
Control variant:	AR
Control panel:	FRONT-MOUNTED
Level control:	YES
Analog input:	0/4-20 MA
Pulse control:	YES
Ext. Stop input:	YES
Analog output:	0/4-20 MA
Output relays:	2
Bus communication:	YES
<b>Others:</b>	
Net weight:	3 kg

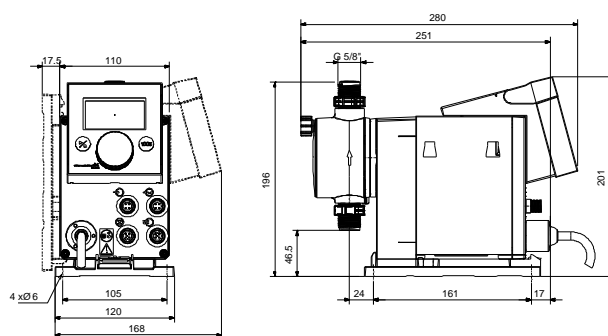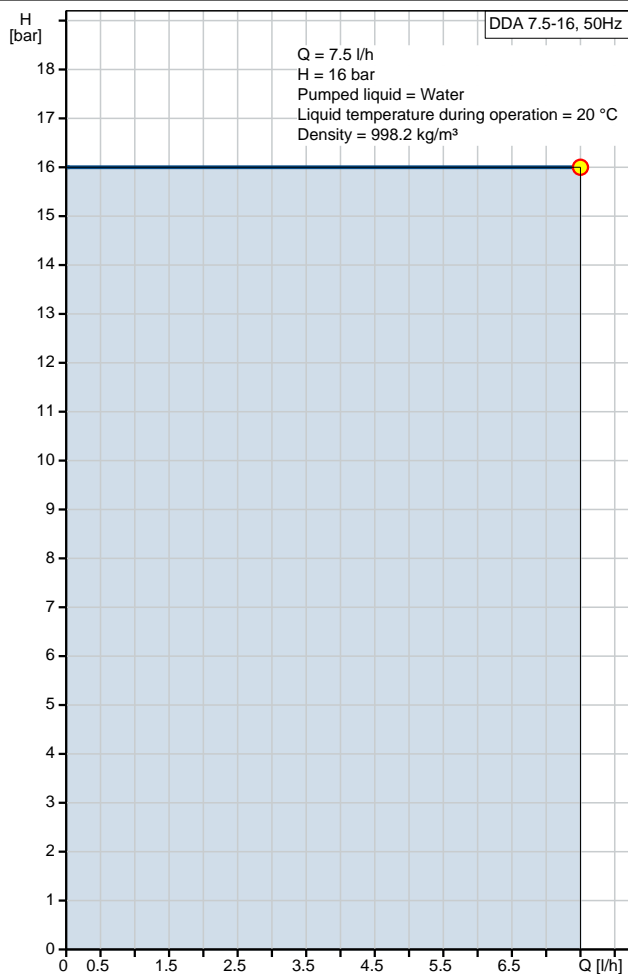



Company name:

Created by:



Phone:

Date:

03/05/2019

Description	Value
Gross weight:	4 kg
Color:	RED

## 97722379 DDA 7.5-16 50 Hz

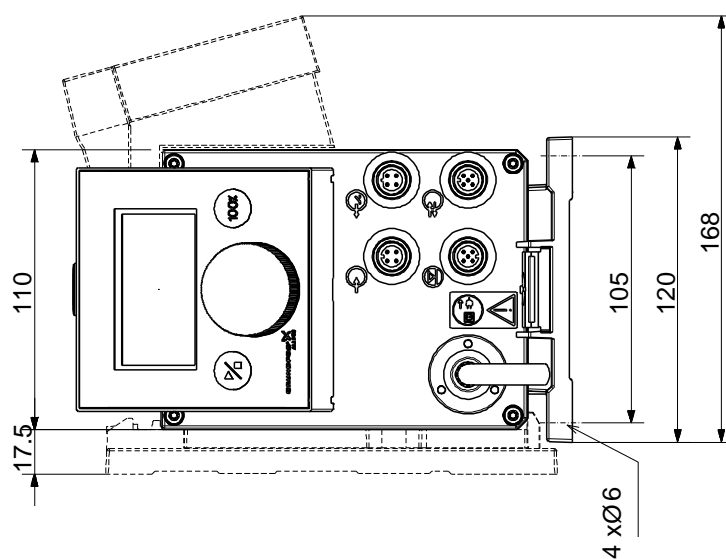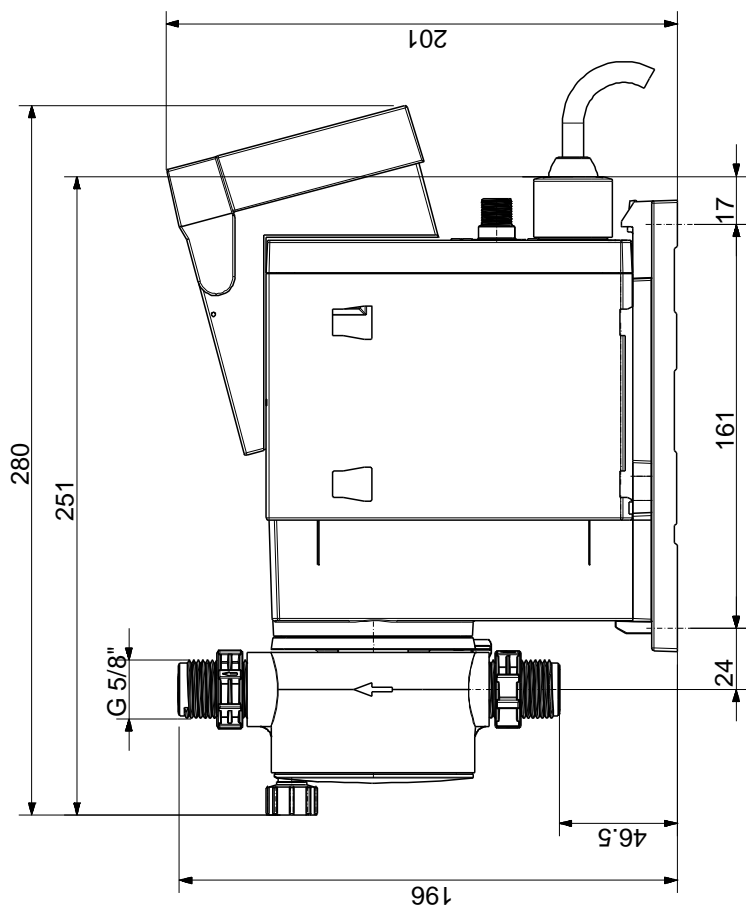

Note! All units are in [mm] unless others are stated.  
Disclaimer: This simplified dimensional drawing does not show all details.



Company name:

Created by:

Phone:

Date:

03/05/2019

---

**Order Data:**

Product name: DDA 7.5-16


Amount: 1

Product No: 97722379

Total: Price on request

---

## Exploded view

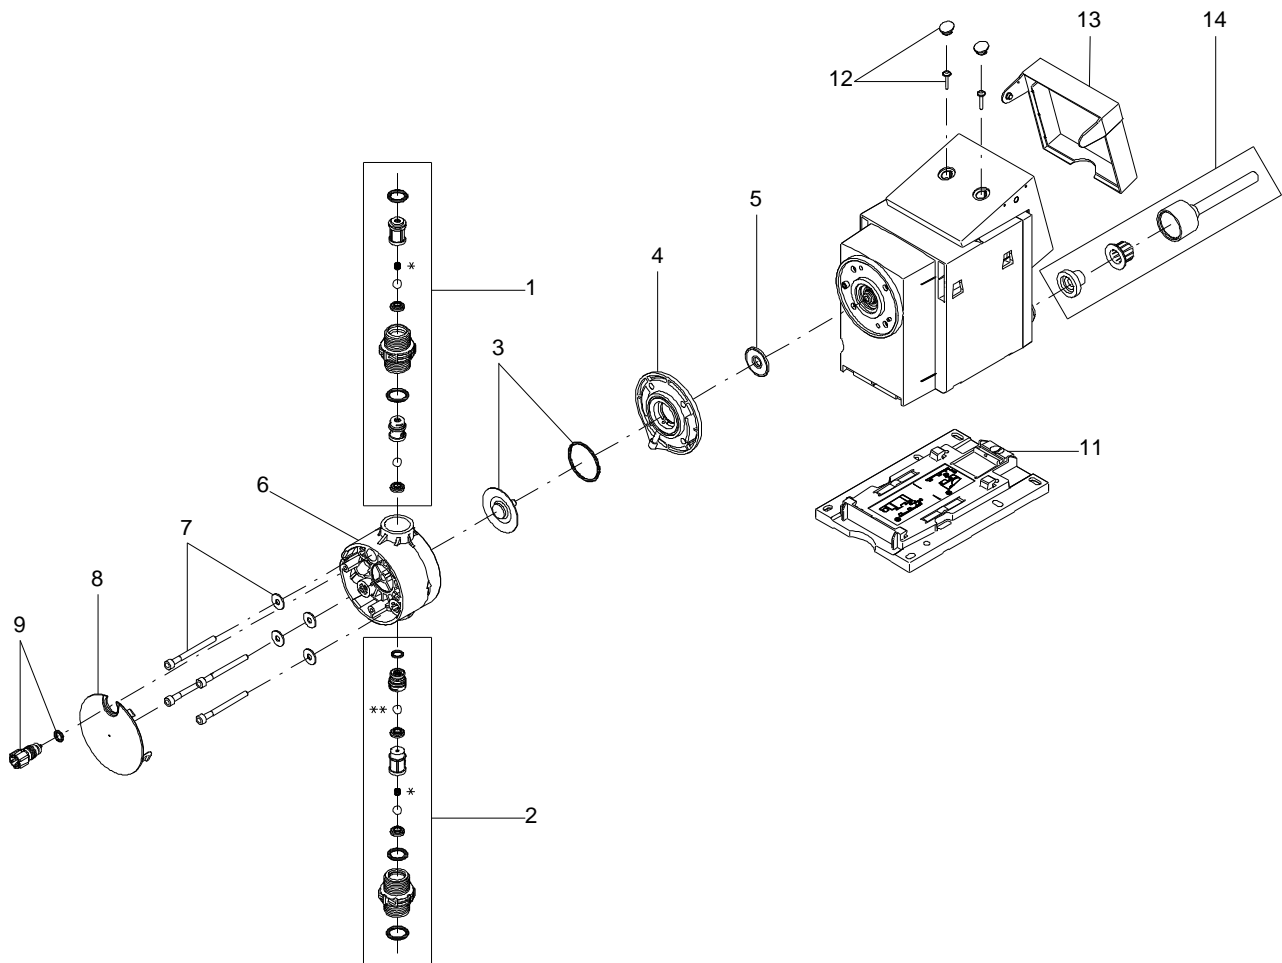

166x112



**Parts list DDA 7.5-16, Product No. 97722379**

**Produced After 1131 (production year and week number)**

Pos	Description	Annotation	Classification Data	Part no.	Qty.	Unit
- 1	Discharge valve cpl.				1	pcs
	O-ring				1	
	O-ring				1	
	Valve seat				1	
	Ball				2	
	Valve housing				1	
	Ball cage				1	
	Ball cage				1	
	Compression spring				1	
- 2	Suction valve cpl.				1	pcs
	O-ring				1	
	O-ring				1	
	O-ring				1	
	Valve seat				2	
	Ball				1	
	Valve housing				1	
	Ball cage				1	
	Ball cage				1	
	Compression spring				1	
3	O-ring		Diameter: 35 Material type: EPDM Thickness: 2		1	pcs
3	Diaphragm				1	pcs
4	Pump head flange				1	pcs
5	Diaphragm				1	pcs
6	Dosing Head				1	pcs
7	Washer				4	pcs
7	Hex socket head cap screw				4	pcs
8	Pump head cover				1	pcs
- 9	Venting valve				1	pcs
	O-ring				1	
	Spindle				1	
11	Base plate				1	pcs
12	Cover for screw				2	pcs
12	Pan washer head screw				2	pcs
13	Cover for cube				1	pcs
14	Power cable				1	pcs