


**NTN BEARING CORPORATION OF AMERICA**

Head Office

1600 E. Bishop Court, P.O. Box 7604

Mount Prospect, IL 60056-7604, U.S.A.


**Phone:** 847-298-7500

**Fax:** 847-699-9744

**Toll Free:** 800-323-2358

**Email:** [mkt@ntnamerica.com](mailto:mkt@ntnamerica.com)
**Website:** [www.ntnamericas.com](http://www.ntnamericas.com)

## Item # NUP206, Cylindrical Roller Bearing - Separable, Short Inner Ring w/ One Rib, Side Plate, Outer Ring w/ Two Ribs

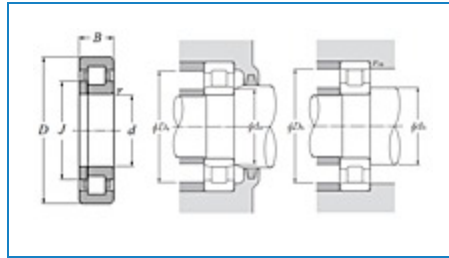

[Order Now](#) | [Technical Specifications](#) | [Dimensional Specifications](#)

### Order Now

#### Ordering Options


[Order Online through NTN DOL](#)  
[Contact NTN Customer Relations](#)  
[Search for a Licensed Distributor](#)

### Technical Specifications

Type	Cylindrical Roller Bearing
Bore Type	Round
Material	Hardened Alloy Steel
Cage Material	Pressed Steel

<b>Limiting Speed - Oil</b>	14000 RPM
<b>Limiting Speed - Grease</b>	12000 RPM
<b>Configuration</b>	One
<b>Tolerance</b>	ISO Class 0 (RBEC 1)
<b>Oil Hole</b>	w/o Oil Hole
<b>Radial Internal Clearance</b>	CN
<b>Static Load Rating</b>	5250 lbf 23300 N 23.30 kN
<b>Dynamic Load Rating</b>	5600 lbf 24900 N 24.90 kN
<b>Enclosure</b>	Open
<b>Weight</b>	0.456 lb 0.207 kg
<b>Operating Temperature Range</b>	-40 to 250 °F -40 to 120 °C

## Dimensional Specifications

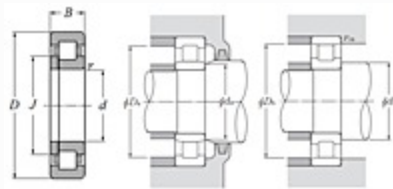

Cylindrical Roller Bearing - Separable, Short Inner Ring w/ One Rib, Side Plate, Outer Ring w/ Two Ribs  
- Dimensions

<b>d</b>	1.1811 in 30.000 mm
<b>D</b>	2.4409 in 62.000 mm
<b>B</b>	0.6299 in 16.000 mm

<b>J</b>	1.6417 in 41.700 mm
<b>r</b>	0.0394 in 1.000 mm
<b>da min</b>	1.3386 in 34.000 mm
<b>db min</b>	1.3780 in 35.000 mm
<b>Da max</b>	2.2441 in 57.000 mm
<b>r1as max</b>	0.0236 in 0.600 mm