


The Timken Company

4500 Mt Pleasant St. NW


N. Canton, OH 44720

Phone: (234) 262-3000

E-Mail: CustomerCAD@timken.com • **Web site:** www.timken.com

Timken Part Number 02872 - 02820, Tapered Roller Bearings - TS (Tapered Single) Imperial

This is the most basic and most widely used type of tapered roller bearing. It consists of two main separable parts: the cone (inner ring) assembly and the cup (outer ring). It is typically mounted in opposing pairs on a shaft.

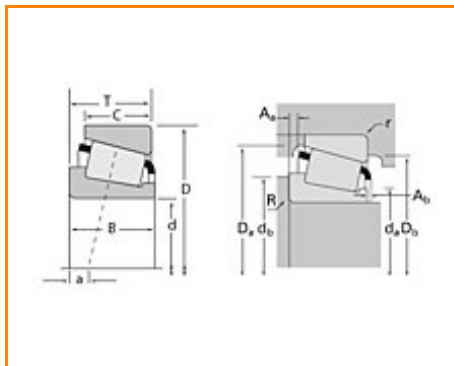

[Specifications](#) | [Dimensions](#) | [Abutment and Fillet Dimensions](#) | [Basic Load Ratings](#) | [Factors](#)

Specifications

Series	02800
Cone Part Number	02872
Cup Part Number	02820
Design Units	Imperial
Bearing Weight	0.500 Kg 1.00 lb
Cage Type	Stamped Steel

Dimensions

d - Bore	28.575 mm 1.1250 in
-----------------	------------------------

D - Cup Outer Diameter	73.025 mm 2.8750 in
B - Cone Width	22.225 mm 0.8750 in
C - Cup Width	17.463 mm 0.6875 in
T - Bearing Width	22.225 mm 0.8750 in

Abutment and Fillet Dimensions

R - Cone Backface "To Clear" Radius¹	0.760 mm 0.03 in
r - Cup Backface "To Clear" Radius²	3.30 mm 0.130 in
da - Cone Frontface Backing Diameter	37.08 mm 1.46 in
db - Cone Backface Backing Diameter	37.59 mm 1.48 in
Da - Cup Frontface Backing Diameter	68.10 mm 2.72 in
Db - Cup Backface Backing Diameter	61.98 mm 2.44 in
Ab - Cage-Cone Frontface Clearance	1.8 mm 0.07 in
Aa - Cage-Cone Backface Clearance	0.8 mm 0.03 in
a - Effective Center Location³	-3.80 mm -0.15 in

Basic Load Ratings

C90 - Dynamic Radial Rating (90 million revolutions)⁴	17000 N 3830 lbf
---	---------------------

C1 - Dynamic Radial Rating (1 million revolutions)⁵	65700 N 14800 lbf
---	----------------------

C0 - Static Radial Rating	74900 N 16800 lbf
----------------------------------	----------------------

C_{a90} - Dynamic Thrust Rating (90 million revolutions)⁶	13200 N 2980 lbf
---	---------------------

Factors

K - Factor⁷	1.29
-------------------------------	------

e - ISO Factor⁸	0.45
-----------------------------------	------

Y - ISO Factor⁹	1.32
-----------------------------------	------

G1 - Heat Generation Factor (Roller-Raceway)	20.6
---	------

G2 - Heat Generation Factor (Rib-Roller End)	10.1
---	------

Cg - Geometry Factor	0.074
-----------------------------	-------

¹ These maximum fillet radii will be cleared by the bearing corners.

² These maximum fillet radii will be cleared by the bearing corners.

³ Negative value indicates effective center inside cone backface.

⁴ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values.


⁵ Based on 1×10^6 revolutions L_{10} life, for the ISO life calculation method.

⁶ Based on 90×10^6 revolutions L_{10} life, for The Timken Company life calculation method. C_{90} and C_{a90} are radial and thrust values for a single-row, $C_{90(2)}$ is the two-row radial value.

⁷ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁸ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

⁹ These factors apply for both inch and metric calculations. Consult your Timken representative for instruction on use.

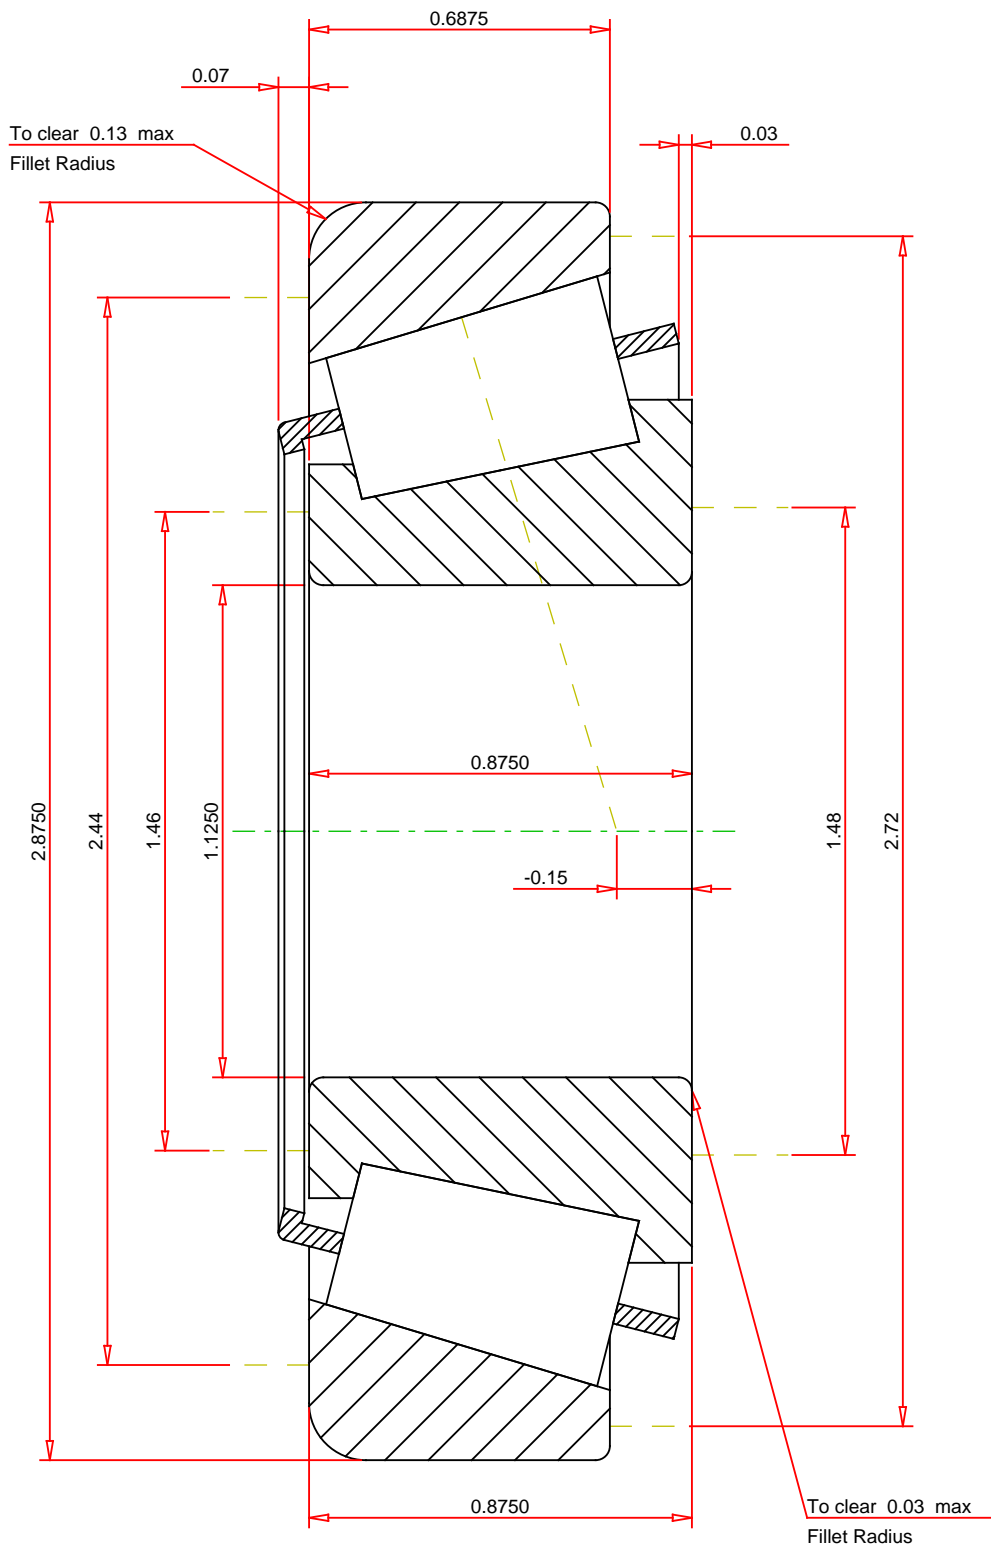

IMPERIAL UNITS

ISO Factor - e 0.45
ISO Factor - Y 1.32
Bearing Weight 1 lb
Number of Rollers Per Row 17
Effective Center Location -0.15 inch

TIMKEN®

THE TIMKEN COMPANY
NORTH CANTON, OHIO USA

02872 - 02820
TS BEARING ASSEMBLY

K Factor 1.29
Dynamic Radial Rating - C90 17000 lbf
Dynamic Thrust Rating - Ca90 13200 lbf
Static Radial Rating - C0 74900 lbf
Dynamic Radial Rating - C1 65700 lbf

Every reasonable effort has been made to ensure the accuracy of the information contained in this writing, but no liability is accepted for errors, omissions or for any other reason.

FOR DISCUSSION ONLY