



**U.S. Tsubaki Power Transmission, LLC**

301 E. Marquardt Dr.

Wheeling, IL 60090

**Phone:** 847.459.9500 or 800.323.7790

**Fax:** 847.459.9515

**Email:** [sales@ustsubaki.com](mailto:sales@ustsubaki.com)


**Website:** [www.ustsubaki.com](http://www.ustsubaki.com)

[All Categories](#) > [Sprockets](#) > [Roller Chain Sprockets](#) > [ANSI Single Pitch Sprockets](#) > [No. 160 - 2" Pitch Sprockets](#) > [No. 160 - 2" Pitch - Plain Bore Sprockets](#) > [Item # 160B25](#)

## ITEM # 160B25, NO. 160 - 2" PITCH - PLAIN BORE SPROCKETS

No. 160, B Style, 1.500" plain bore

**All dimensions are nominal values and for reference only**

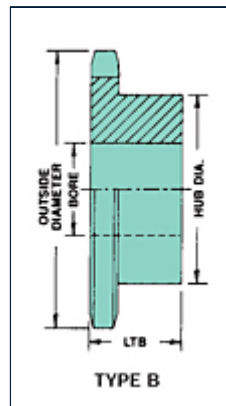

[Specifications](#) | [Chain Technical Data](#) | [Sprocket Diameters](#)

Specifications	
Stock Bore Diameter	1.500 in
<b>Hub Diameter<sup>1</sup></b>	7.000 in
LTB	3.000 in
Style	B

No. Teeth	25
<b>Max. Bore<sup>2</sup></b>	5.250 in
Weight	81.000 lb
Tooth Nominal Width	1.156 in
Hardened Teeth	Yes

#### Chain Technical Data

Pitch	2.000 in
Chain Size	160

#### Sprocket Diameters

Outside Diameter	17.030 in
Pitch Diameter	15.958 in
Caliper Diameter	14.801 in

<sup>1</sup> Hub diameter may vary to suit bore sizes

<sup>2</sup> Dimensions shown allow for standard keyway with set screw at 90°