



U.S. Tsubaki Power Transmission, LLC
 301 E. Marquardt Dr.
 Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790

Fax: 847.459.9515



Email: sales@ustsubaki.com

Website: www.ustsubaki.com

ITEM # 25B22, NO. 25 - 1/4" PITCH - PLAIN BORE SPROCKETS

No. 25, B Style, .250" plain bore

All dimensions are nominal values and for reference only

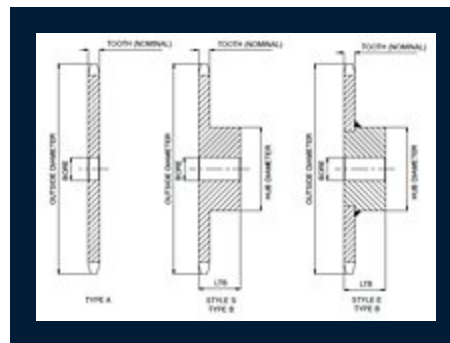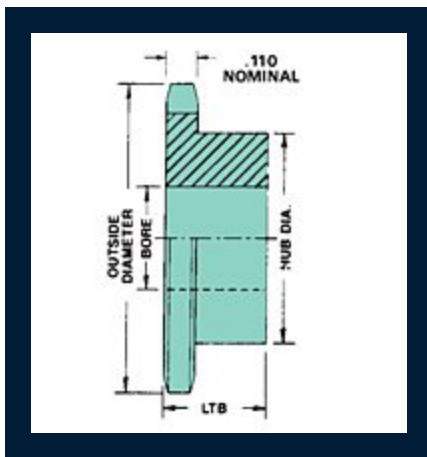

[Sprocket Specifications](#) | [Chain Technical Data](#)

Sprocket Specifications

Stock Bore Diameter	0.250 in
Hub Diameter	1.438 in
LTB	0.625 in
Style	B
No. Teeth	22
Outside Diameter	1.889 in

Pitch Diameter	1.757 in
Caliper Diameter	1.627 in
Max. Bore¹	0.938 in
Weight	0.310 lb
Tooth Nominal Width	0.110 in
Hardened Teeth	No

Chain Technical Data

Pitch	0.250 in
Chain Size	25
Inside Width	0.125 in
Roller Diameter	0.130 in

¹ Dimensions shown allow for standard keyway with set screw at 90°.