



**U.S. Tsubaki Power Transmission, LLC**  
 301 E. Marquardt Dr.  
 Wheeling, IL 60090

**Phone:** 847.459.9500 or 800.323.7790

**Fax:** 847.459.9515



**Email:** [sales@ustsubaki.com](mailto:sales@ustsubaki.com)

**Website:** [www.ustsubaki.com](http://www.ustsubaki.com)

## ITEM # 25B30, NO. 25 - 1/4" PITCH - PLAIN BORE SPROCKETS

No. 25, B Style, .3750" plain bore

All dimensions are nominal values and for reference only

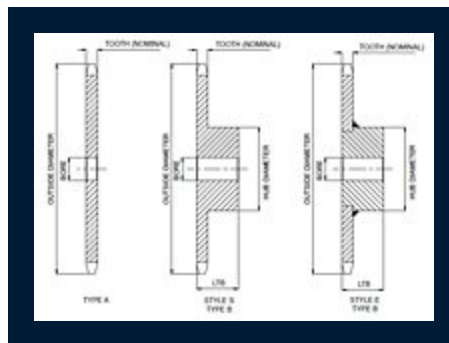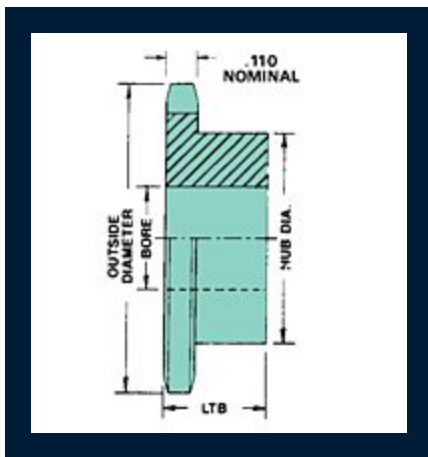

[Sprocket Specifications](#) | [Chain Technical Data](#)

### Sprocket Specifications

<b>Stock Bore Diameter</b>	0.375 in
<b>Hub Diameter</b>	1.500 in
<b>LTB</b>	0.625 in
<b>Style</b>	B
<b>No. Teeth</b>	30
<b>Outside Diameter</b>	2.529 in

<b>Pitch Diameter</b>	2.392 in
<b>Caliper Diameter</b>	2.262 in
<b>Max. Bore<sup>1</sup></b>	1.000 in
<b>Weight</b>	0.380 lb
<b>Tooth Nominal Width</b>	0.110 in
<b>Hardened Teeth</b>	No

#### Chain Technical Data

<b>Pitch</b>	0.250 in
<b>Chain Size</b>	25
<b>Inside Width</b>	0.125 in
<b>Roller Diameter</b>	0.130 in

<sup>1</sup> Dimensions shown allow for standard keyway with set screw at 90°.