



U.S. Tsubaki Power Transmission, LLC
 301 E. Marquardt Dr.
 Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790

Fax: 847.459.9515

Email: sales@ustsubaki.com

Website: www.ustsubaki.com


ITEM # 40B10, NO. 40 - 1/2" PITCH - PLAIN BORE SPROCKETS

No. 40, B Style, .500" plain bore

Has recessed groove in hub for chain clearance

Consult U.S. Tsubaki for availability of No. 41 Plain Bore Sprockets.

All dimensions are nominal values and for reference only

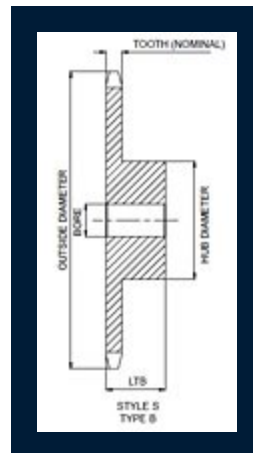

[Specifications](#) | [Chain Technical Data](#)

Specifications

| | |
|----------------------------|----------|
| Stock Bore Diameter | 0.500 in |
| Hub Diameter | 1.250 in |
| LTB | 0.875 in |
| Style | B |
| No. Teeth | 10 |

| | |
|------------------------------|----------|
| Outside Diameter | 1.840 in |
| Pitch Diameter | 1.618 in |
| Caliper Diameter | 1.305 in |
| Max. Bore¹ | 0.750 in |
| Weight | 0.270 lb |
| Tooth Nominal Width | 0.284 in |
| Hardened Teeth | Yes |

Chain Technical Data

| | |
|-------------------|----------|
| Pitch | 0.500 in |
| Chain Size | 40 |

¹ Dimensions shown allow for standard keyway with set screw at 90°