



U.S. Tsubaki Power Transmission, LLC

301 E. Marquardt Dr.

Wheeling, IL 60090

Phone: 847.459.9500 or 800.323.7790

Fax: 847.459.9515


Email: sales@ustsubaki.com

Website: www.ustsubaki.com

[All Categories](#) > [Sprockets](#) > [Roller Chain Sprockets](#) > [ANSI Single Pitch Sprockets](#) > [No. 240 - 3" Pitch - Plain Bore Sprockets](#) > Item # 240B25

ITEM # 240B25, NO. 240 - 3" PITCH - PLAIN BORE SPROCKETS

All dimensions are nominal values and for reference only

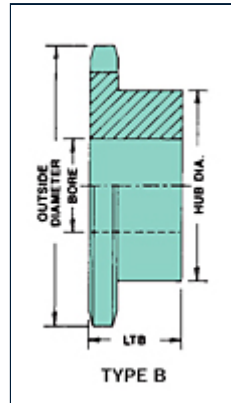

[Specifications](#) | [Chain Technical Data](#) | [Sprocket Diameters](#)

Specifications

Stock Bore Diameter	1.500 in
Hub Diameter¹	8.000 in
LTB	4.125 in
Style	B
No. Teeth	25

Max. Bore²	5.500 in
Weight	254.000 lb
Tooth Nominal Width	1.738 in
Hardened Teeth	Yes

Chain Technical Data

Pitch	3.000 in
Chain Size	240

Sprocket Diameters

Outside Diameter	25.550 in
Pitch Diameter	23.936 in
Caliper Diameter	22.014 in

¹ Hub diameter may vary to suit bore sizes

² Dimensions shown allow for standard keyway with set screw at 90°